





***2026 Cable Catalog***  
**Fiber Optic – Hybrid – Copper**

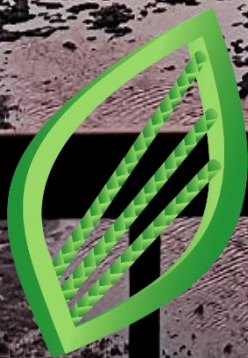

**Linden Photonics, Inc.**

*Purpose-Built Cables*

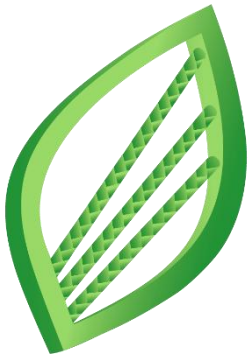


# TABLE OF CONTENTS

<a href="#"><u>STFOC™ Optical Cables</u></a>	Page 3
<a href="#"><u>Buoyant Optical Cables</u></a>	Page 6
<a href="#"><u>High Strength Non-Buoyant Cables</u></a>	Page 9
<a href="#"><u>Hybrid Cables</u></a>	Page 12
<a href="#"><u>AVNOCT™ Avionic Cables</u></a>	Page 16
<a href="#"><u>RadHard Cables</u></a>	Page 19
<a href="#"><u>STFOC™ Patchcords</u></a>	Page 22
<a href="#"><u>Phase Stabilized STFOC™</u></a>	Page 25
<a href="#"><u>Precision Wound Spools</u></a>	Page 28
<a href="#"><u>MicroTethers</u></a>	Page 30
<a href="#"><u>Gel-Filled Loose Tubes</u></a>	Page 34
<a href="#"><u>Copper Cables</u></a>	Page 37
<a href="#"><u>Ribbon</u></a>	Page 41
<a href="#"><u>Cable Basics 101</u></a>	Page 44
<a href="#"><u>Fiber Basics 101</u></a>	Page 45
<a href="#"><u>Wire Charts</u></a>	Page 46
<a href="#"><u>Cable Definitions</u></a>	Page 47

When you **ABSOLUTELY** need to stay **CONNECTED**

WHEN YOU ABSOLUTELY NEED TO STAY CONNECTED

Linden Photonics was founded in 2002 and since its inception we have cultivated a range of the world's best performing cables. Our high strength optical cables, hybrid and specialty copper cables are built for environments where high performance and compact size are critical.

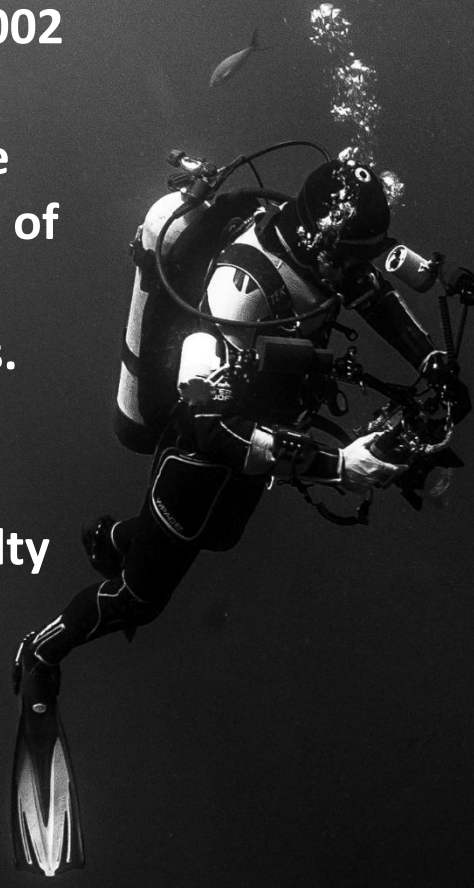

From the deepest depths of the ocean to land based operations to aerospace and onto satellites our objective is to provide you with cost-effective, high-performance cables in all shapes and sizes. Small & buoyant, strong & light, high-temp & radhard, Linden gets you from A to B. If you don't find what you need in our catalog, contact us for custom, short-run designs.



***STFOC***  
***Optical Cable***  
**Non-Kink**  
**Crush Proof**




# STFOC



Linden's STFOC™ cables are available for a variety of underwater uses from munitions tethers to ROV controls to littoral water sensing. STFOC uses our patented cable jacket construction designed to protect the fiber in the harsh subsea environment. Non-Kink™ STFOC has a patented design to protect your fiber from the dangers of hockling. Compact and rugged; flexible and strong. Custom configurations available.


## Features

- Patented Liquid Crystal Polymer (LCP) jacketing (US Patent No. [7,570,853](#))
- Patented Non-Kink construction (US Patent No. [8,842,956](#))
- 100% thermoplastic jacket eliminates need for metal & Kevlar
- Non-Kink™ design prevents hockling
- Lightweight – LCP density:  $1.4\text{g/cm}^3$  compared to Inconel 625:  $8.4\text{g/cm}^3$
- Long continuous lengths >25km
- Hermetic coating protects fiber from moisture/hydrogen/helium
- Tight diameter tolerance
- Abrasion resistant

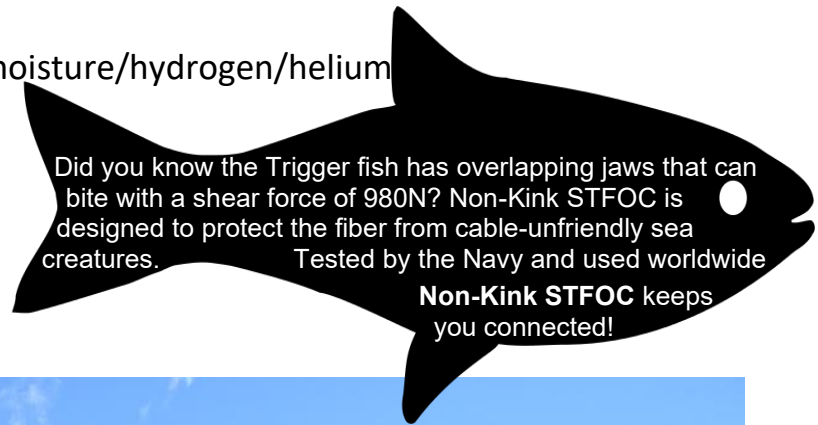

## Advantages

- Crush proof
- Withstands high hydrostatic pressure
- Thin, lightweight, yet strong
- Non-corrosive
- No hydrogen outgassing
- Better moisture protection than carbon
- Precision windable
- High-Temp STFOC Available with operating temp of 180C

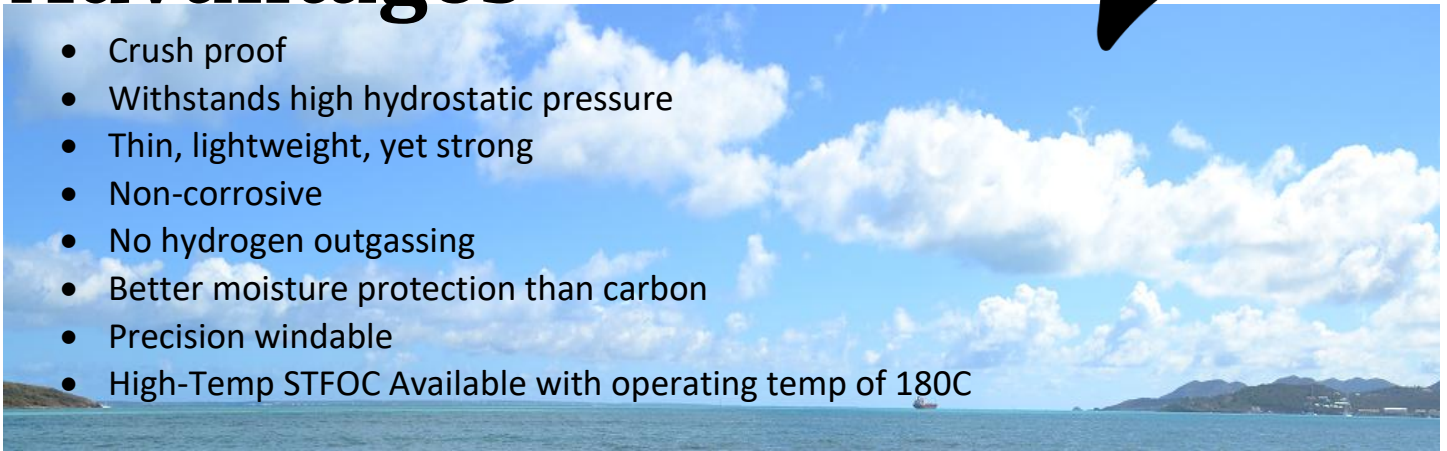



### Singlemode

Spec No.	Part No.	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
<a href="#">LINDEN-SPE-7273</a>	1-SM-A-17-B-19	0.480	0.45	0.35	20	0.24
<a href="#">LINDEN-SPE-7090</a>	1-SM-A-17-B-20	0.500	0.45	0.35	20	0.25
<a href="#">LINDEN-SPE-7053</a>	1-SM-A-21-B-24	0.600	0.45	0.35	30	0.4
<a href="#">LINDEN-SPE-7034</a>	1-SM-A-27-B-30	0.762	0.45	0.35	50	0.6
<a href="#">LINDEN-SPE-7309*</a>	1-V-A-24-M-30	0.762	0.45	0.35	40	0.67
<a href="#">LINDEN-SPE-7092*</a>	1-V-A-27-R-35	0.890	0.45	0.40	50	1.0
<a href="#">LINDEN-SPE-7035</a>	3-SM-A-35-B-38	0.965	0.45	0.35	50	0.9
<a href="#">LINDEN-SPE-7394</a>	3-SM-A-35-R-40	1.02	0.45	0.35	50	0.97
<a href="#">LINDEN-SPE-7331</a>	1-RR-A-27-J-60	1.52	0.45	0.35	50	2.5
<a href="#">LINDEN-SPE-7043</a>	1-SM-A-35-Q-65	1.65	0.45	0.35	70	2.6
<a href="#">LINDEN-SPE-7196</a>	1-SM-A-35-Q-79	2.0	0.45	0.35	70	3.7
<a href="#">LINDEN-SPE-7057</a>	3-SM-A-35-Q-87	2.2	0.45	0.35	70	3.9
<a href="#">LINDEN-SPE-7329†</a>	1-SM-A-21-B-24-W-48-Q-95	2.4	0.45	0.35	300	9.0
<a href="#">LINDEN-SPE-7374</a>	6-FO-P-106	2.7	0.50	0.50	100	6.2
<a href="#">LINDEN-SPE-7039</a>	7-3-A-55-Q-125	3.2	0.45	0.35	60	9.0

\*Mid-Temp (150C) STFOC / †Stainless Steel Armored


### Multimode (50/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
<a href="#">LINDEN-SPE-7069</a>	1-F-A-21-B-24	0.600	3.5	3.0	30	0.4
<a href="#">LINDEN-SPE-7070</a>	1-F-A-27-B-30	0.762	3.5	3.0	50	0.6
<a href="#">LINDEN-SPE-7310*</a>	1-W-A-24-M-30	0.762	3.5	3.0	40	0.67
<a href="#">LINDEN-SPE-7182</a>	1-W-A-27-J-35	0.890	3.5	3.0	50	0.9
<a href="#">LINDEN-SPE-7071</a>	3-F-A-35-B-38	0.965	3.5	3.0	50	0.9
<a href="#">LINDEN-SPE-7044</a>	1-F-A-35-Q-65	1.65	3.5	3.0	70	2.6
<a href="#">LINDEN-SPE-7197</a>	1-F-A-35-Q-79	2.0	3.5	3.0	70	3.7

\*High-Temp (180C) STFOC

### Multimode (62.5/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
<a href="#">LINDEN-SPE-7046</a>	1-I-A-35-Q-65	1.65	3.5	3.0	70	2.6
<a href="#">LINDEN-SPE-7198</a>	1-I-A-35-Q-79	2.0	3.5	3.0	70	3.7
<a href="#">LINDEN-SPE-7072</a>	7-I-A-55-G-125	3.2	3.5	3.0	60	9.0

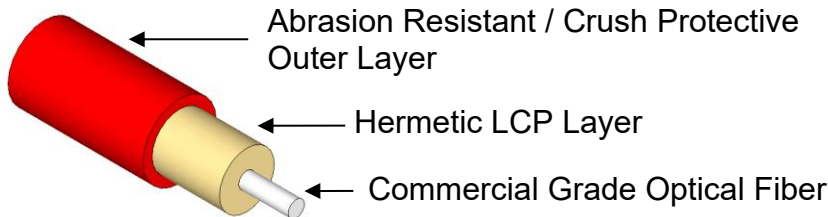

CONTACT LINDEN FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS



***Buoyant Cable***

**Floats**

**Strong**

**Neutrally Buoyant**



# Buoyant Cable

Linden's buoyant STFOC™ fiber optic cables are available for a variety of underwater uses from munitions tethers to ROV controls to mooring buoys.

Our lightweight, buoyant designs are customized to your needs. From neutrally buoyant designs to cable that will float on water, we can customize your size, buoyancy and strength. Using Linden's patented cable jacket construction designed to protect the fiber in the harsh subsea environment, our cables are compact and rugged; flexible and strong.

## Features

- From the thinnest, lightest 290µm cable to 13mm+ cables with multi-ton break strength
- Precise density control for positive, neutral or negative buoyancy
- Designs with or without Kevlar
- Non-Kink™ design prevents hocking
- Continuous lengths >5km
- Hermetic coating protects fiber from moisture Hydrogen & Helium for increased operational life
- Abrasion resistant



GA Tech used a 3.5 mm Linden STFOC tether on a NASA funded project to deploy a 10 ft long ROV under the Ross Ice Shelf in Antarctica capturing never before seen footage.

## Advantages

- Crush proof
- Non-corrosive
- No hydrogen outgassing
- Thin, lightweight, yet strong
- Stainless Steel Armoring Available





### Singlemode

Spec No.	Part No.	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	Density (s.g.)
<a href="#">LINDEN-SPE-7089</a>	1-FF-C-2-11-ORN	0.295	1.0	1.0	10	1.13
<a href="#">LINDEN-SPE-7263</a>	1-JJ-C-16	0.333	0.45	0.35	10	1.12
<a href="#">LINDEN-SPE-7040</a>	1-SM-C-20	0.500	0.35	0.25	10	1.03
<a href="#">LINDEN-SPE-7096</a>	1-SM-A-21-R-36-YEL	0.900	0.45	0.35	40	1.03
<a href="#">LINDEN-SPE-7260</a>	1-SM-A-21-R-33-B-36-YEL	0.915	0.45	0.30	45	1.045
<a href="#">LINDEN-SPE-7207</a>	1-SM-A-27-R-46-YEL	1.1	0.45	0.35	50	1.027
<a href="#">LINDEN-SPE-7073</a>	1-SM-A-27-L-67	1.7	0.45	0.35	50	1.02
<a href="#">LINDEN-SPE-7036</a>	1-SM-A-27-O-47-L-75	1.9	0.45	0.35	250	1.01
<a href="#">LINDEN-SPE-7411</a>	1-SM-J-36-O-56-L-85	2.2	0.45	0.35	250	0.95
<a href="#">LINDEN-SPE-7223</a>	1-SM-A-27-B-30-O-47-L-108	2.75	0.45	0.35	250	1.00
<a href="#">LINDEN-SPE-7055</a>	1-SM-A-27-O-67-L-137	3.5	0.45	0.35	450	0.99
<a href="#">LINDEN-SPE-7098</a>	1-SM-A-27-O-55-X-137	3.5	0.45	0.35	750	0.99
<a href="#">LINDEN-SPE-7401</a>	4-SM-V-102-O-122-FQ-140	3.55	0.45	0.35	250	1.03
<a href="#">LINDEN-SPE-7494</a>	4-SM-63-V-O-90-X-157	4.0	0.5	0.5	660	0.89
<a href="#">LINDEN-SPE-7094</a>	1-SM-A-27-R-46-O-101-X-169-YEL	4.3	0.45	0.35	1,200	0.97
<a href="#">LINDEN-SPE-7281</a>	2-SM-V-63-O-134-FQ-174	4.4	0.50	0.50	1,350	1.03
<a href="#">LINDEN-SPE-7491</a>	2-SM-63-V-FQ-130-O-145-Q-177	4.5	0.50	0.50	660	0.92
<a href="#">LINDEN-SPE-7316*</a>	1-SM-A-21-B-24-W-48-FQ-185	4.7	0.45	0.35	300	0.95
<a href="#">LINDEN-SPE-7229</a>	1-SM-A-21-R-35-O-175-X-232	5.9	0.50	0.50	1,700	0.98
<a href="#">LINDEN-SPE-7534</a>	1-SM-A-27-B-30-O-47-L-108-O-170-FQ-246	6.2	0.45	0.35	2,000	0.92
<a href="#">LINDEN-SPE-7305</a>	1-SM-A-27-B-30-O-120-FQ-250	6.35	0.45	0.35	1,300	0.75
<a href="#">LINDEN-SPE-7420</a>	1-SM-A-27-B-30-O-80-FQ-300	7.6	0.45	0.35	750	0.70
<a href="#">LINDEN-SPE-7600</a>	1-SM-A-27-B-30-O-80-FKK-300	7.6	0.45	0.35	750	0.60
<a href="#">LINDEN-SPE-7137</a>	4-FO-L-183-O-242-L-370	9.4	0.60	0.60	2,750	0.97
<a href="#">LINDEN-SPE-7059</a>	1-SM-A-27-L-160-T-230-L-440-Q-520	13.2	0.60	0.40	2,750	1.03
<a href="#">LINDEN-SPE-7060</a>	3-SM-A-41-L-174-T-244-L-454-Q-534	13.6	0.40	0.30	2,750	1.02


### Multimode (50/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Tensile Strength (lbs)	Density (s.g.)
<a href="#">LINDEN-SPE-7074</a>	1-F-C-5-20	0.500	3.5	3.0	10	0.95
<a href="#">LINDEN-SPE-7075</a>	1-F-A-27-L-67	1.7	3.5	3.0	50	1.02
<a href="#">LINDEN-SPE-7076</a>	1-F-A-27-O-47-L-75	1.9	3.5	3.0	250	1.01
<a href="#">LINDEN-SPE-7412</a>	1-F-J-36-O-56-L-85	2.2	3.5	3.0	250	0.95
<a href="#">LINDEN-SPE-7456</a>	1-AC-V-63-O-85-L-120	3.0	3.0	1.0	450	1.0
<a href="#">LINDEN-SPE-7077</a>	1-F-A-27-O-67-L-137	3.5	3.5	3.0	450	0.99
<a href="#">LINDEN-SPE-7280</a>	4-FO-O-170-L-300-GG-340	6.6	3.5	3.0	450	1.03
<a href="#">LINDEN-SPE-7078</a>	1-F-A-27-L-160-T-230-L-440-Q-520	13.2	3.5	3.0	2,000	1.03

### Multimode (62.5/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Tensile Strength (lbs)	Density (s.g.)
<a href="#">LINDEN-SPE-7093</a>	1-I-A-27-O-47-L-75	1.9	3.5	3.0	250	1.01
<a href="#">LINDEN-SPE-7091</a>	1-I-A-A-27-O-67-L-137	3.5	3.5	3.0	450	0.99

Optional Ruggedized Outer Layer

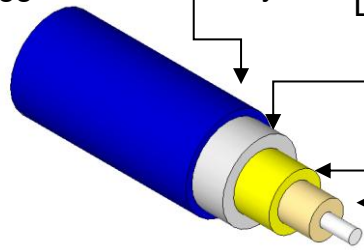

Low Density (Buoyant) Material

Optional Kevlar Strength Members

Hermetic LCP Layer

Commercial Grade Optical Fiber

CONTACT LINDEN FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS

\*Stainless Steel Armored



# ***High Strength Cable***


**Thin**

**Lightweight**

**Rugged**



# High Strength Cable

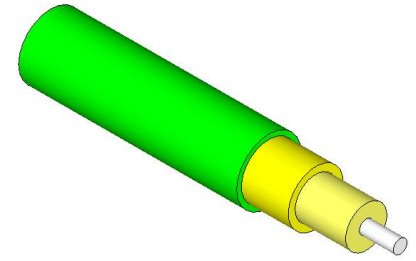

Linden's High Strength Non- Buoyant Cables are lightweight & flexible.

Rugged exterior, lightweight design and long continuous lengths give us an edge over competing cables. Using Linden's patented cable jacket construction designed to protect the fiber in the harsh subsea environment, our cables pull their weight.

## Features

- Over 2,500lbs. breaking strength
- Lightweight – LCP density:  $1.4\text{g/cm}^3$  compared to inconel 625:  $8.4\text{g/cm}^3$
- Continuous lengths >5km
- Hermetic coating protects fiber from moisture/hydrogen/helium
- Abrasion resistant




Making a cable **strong** is more complex than it may seem. Things like strength member selection, denier, number of elements, picks per inch, **lay length**, to braid or contra-helically serve, are but some of the factors one must consider when designing a cable. Different uses may call for different designs. Putting an **optical fiber** in the middle of all those strength members only complicates things.

Talk with **Linden** about how to build a cable that works for you.

## Advantages

- Long continuous lengths
- Corrosion Resistant
- No hydrogen Darkening

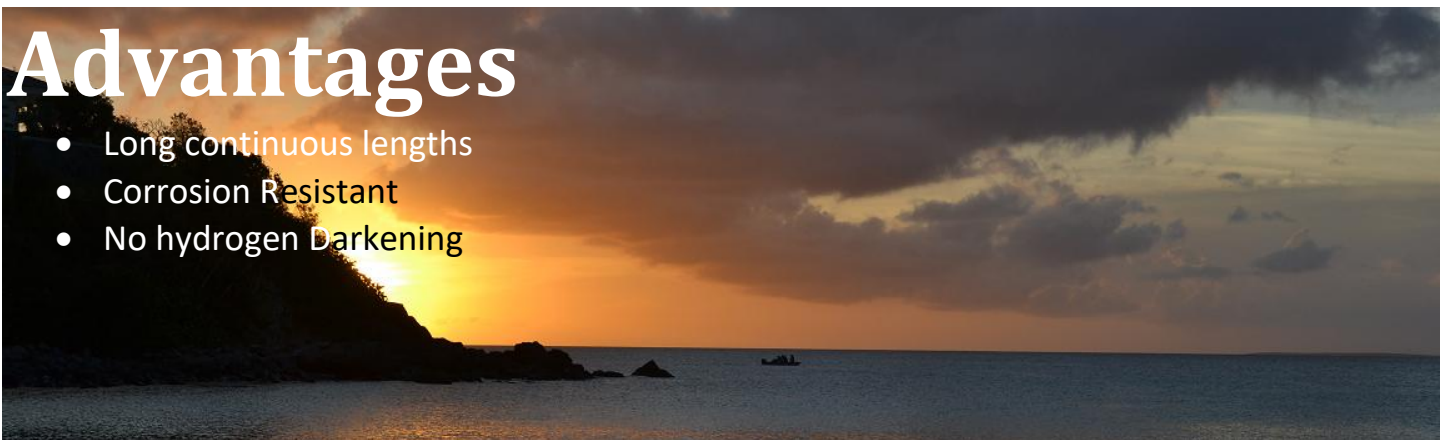



### Singlemode


Spec No.	Part No.	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
<a href="#">LINDEN-SPE-7608</a>	1-SM-A-17-B-20-O-31-Q-55	1.4	0.50	0.50	125	2.1
<a href="#">LINDEN-SPE-7627</a>	1-SM-A-27-O-47-J-70	1.8	0.45	0.35	250	3.6
<a href="#">LINDEN-SPE-7052</a>	1-SM-A-27-O-45-Q-75	1.9	0.45	0.35	250	3.6
<a href="#">LINDEN-SPE-7050</a>	1-SM-A-27-O-55-Q-95	2.4	0.45	0.35	450	5.5
<a href="#">LINDEN-SPE-7282</a>	3-SM-A-35-B-38-T-95-Q-118	3.0	0.50	0.50	1,200	7.9
<a href="#">LINDEN-SPE-7573</a>	1-SM-A-27-O-55-Q-137	3.5	0.45	0.35	750	11.5
<a href="#">LINDEN-SPE-7171</a>	1-SM-J-35-O-45-Q-145	3.7	0.45	0.35	250	11
<a href="#">LINDEN-SPE-7097</a>	1-SM-A-27-O-82-Q-147	3.7	0.45	0.35	1,200	13
<a href="#">LINDEN-SPE-7114</a>	1-SM-A-27-O-67-GG-147	3.7	0.45	0.35	1,100	13.4
<a href="#">LINDEN-SPE-7300</a>	12-FO-U-114-O-134-Q-176	4.5	0.50	0.50	250	16
<a href="#">LINDEN-SPE-7457</a>	12-FO-GFLT-O-124-Q-184	4.7	0.45	0.35	250	18
<a href="#">LINDEN-SPE-7334</a>	1-SM-A-27-R-44-Z-146-Q-190	4.8	0.45	0.35	3,100	18.7
<a href="#">LINDEN-SPE-7593</a>	2-SM-V-63-O-128-Q-188	4.8	0.60	0.60	2,000	19
<a href="#">LINDEN-SPE-7473</a>	7264-O-138-Q-197	5.0	0.50	0.30	1,400	22
<a href="#">LINDEN-SPE-7511</a>	12-FO-O-139-Q-200	5.1	0.50	0.50	1,000	25
<a href="#">LINDEN-SPE-7398</a>	4-FO-O-170-Q-210	5.3	0.50	0.50	2,200	34
<a href="#">LINDEN-SPE-7407</a>	2-FO-V-63-O-96-Q-136-NN-151-Q-215	5.5	0.50	0.50	250	28
<a href="#">LINDEN-SPE-7404</a>	8-SM-U-114-O-134-Q-216	5.5	0.50	0.50	250	25
<a href="#">LINDEN-SPE-7312</a>	4-SM-V-102-T-142-Q-232	5.9	0.36	0.21	250	27
<a href="#">LINDEN-SPE-7429</a>	1-SM-V-102-O-115-Q-236	6.0	0.45	0.35	450	31
<a href="#">LINDEN-SPE-7322</a>	16-SM-T-240-Q-255	6.5	0.36	0.21	250	28
<a href="#">LINDEN-SPE-7577</a>	7098-O-177-OO-275	7.0	0.45	0.35	2,000	36
<a href="#">LINDEN-SPE-7383</a>	7098-T-236-Q-300	7.6	0.50	0.50	10,000	51
<a href="#">LINDEN-SPE-7082</a>	1-SM-A-27-B-30-O-47-L-108-O-170-Q-236	7.9	0.45	0.35	2,000	41
<a href="#">LINDEN-SPE-7371</a>	4-FO-P-136-O-236-Q-316	8.0	0.50	0.50	10,000	68
<a href="#">LINDEN-SPE-7312</a>	24-FO-O-270-Q-334	8.5	0.50	0.50	-	33
<a href="#">LINDEN-SPE-7289</a>	4-FO-X-140-O-308-OO-349	8.8	0.50	0.50	9,000	57
<a href="#">LINDEN-SPE-7256</a>	4-FO-P-136-O-193-FQ-393	10.0	0.50	0.50	5,000	80
<a href="#">LINDEN-SPE-7399</a>	24-SM-O-445-Q-475-NN-483-Q-523	13.3	0.45	0.35	3,200	120
<a href="#">LINDEN-SPE-7583</a>	2-SM-V-63-T-281-Q-525	13.3	0.50	0.50	12,200	160
<a href="#">LINDEN-SPE-7275</a>	4-FO-P-169-O-216-P-246-FQ-393	15.0	0.50	0.50	8,000	176

### Multimode (50/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1310nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
<a href="#">LINDEN-SPE-7083</a>	1-F-A-27-O-47-Q-75	1.9	3.5	3.0	250	3.6
<a href="#">LINDEN-SPE-7084</a>	1-F-A-27-O-67-Q-95	2.4	3.5	3.0	450	5.5
<a href="#">LINDEN-SPE-7622</a>	16-FO-U-14-O-121-J-148-BLK	3.76	3.0	1.0	250	18
<a href="#">LINDEN-SPE-7387</a>	2-FO-V-63-O-134-FQ-174	4.4	3.0	1.0	1,350	15
<a href="#">LINDEN-SPE-7591</a>	2-FO-V-63-O-128-Q-188	4.8	3.0	1.0	2,000	19
<a href="#">LINDEN-SPE-7396</a>	4-MM-V-102-T-142-Q-232	5.9	3.0	1.0	250	27
<a href="#">LINDEN-SPE-7388</a>	4-FO-V-102-O-157-FQ-236	6.0	3.0	1.0	1,200	19.5
<a href="#">LINDEN-SPE-7400</a>	24-MM-O-445-Q-475-NN-483-Q-523	13.3	3.0	1.0	3,200	120

### Multimode (62.5/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1310nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
<a href="#">LINDEN-SPE-7085</a>	1-I-A-27-O-47-Q-75	1.9	3.5	3.0	250	3.6
<a href="#">LINDEN-SPE-7086</a>	1-I-A-27-O-67-Q-95	2.4	3.5	3.0	450	5.5
<a href="#">LINDEN-SPE-7159</a>	1-I-J-35-O-45-Q-137	3.5	3.5	3.0	250	11
<a href="#">LINDEN-SPE-7268</a>	3-I-V-63-O-103-Q-190	4.8	2.9	1.0	1,200	20
<a href="#">LINDEN-SPE-7087</a>	1-I-A-27-L-160-T-230-Q-310	7.9	3.5	3.0	2,000	41

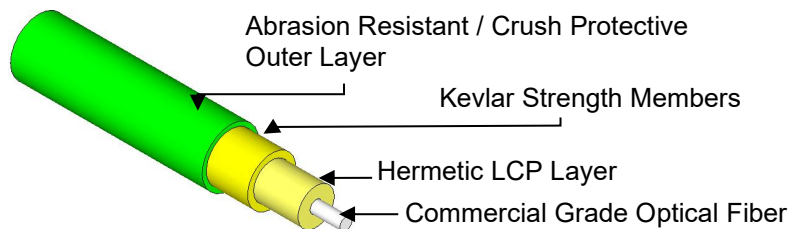

CONTACT LINDEN FOR  
MORE DETAILED  
SPECIFICATIONS OR  
CUSTOM REQUIREMENTS




# ***Hybrid Cables***

**Rugged & Durable**

**Buoyant**

**Thin & Lightweight**

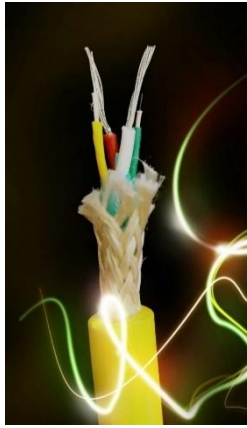

# Hybrid Cables


Linden Photonics hybrid cables integrate copper and fiber in a lightweight, robust design. Customizable in size, buoyancy, and strength, options range from neutrally buoyant to ultra-thin cables with various conductors and fiber types. Patented jacket construction ensures fiber protection in harsh subsea environments. Compact, rugged, flexible, and strong, Linden’s hybrid cables deliver reliable performance.

## Features

- Rugged, durable patented STFOC fiber optic elements
- Hermetic coating protects fiber from moisture
- Buoyant designs
- Thin wall insulation = thinner/lighter cables
- Fiber strength members = lighter cables
- Vectran strength members available offering less self-abrasion and longer service life
- 300V, 600V & 1,000V standard ratings

Our standard TPU is an **Ether grade** providing better hydrolysis performance in moisture rich environments.

**Ester grades** are available non-humid environments requiring improved abrasion resistance.

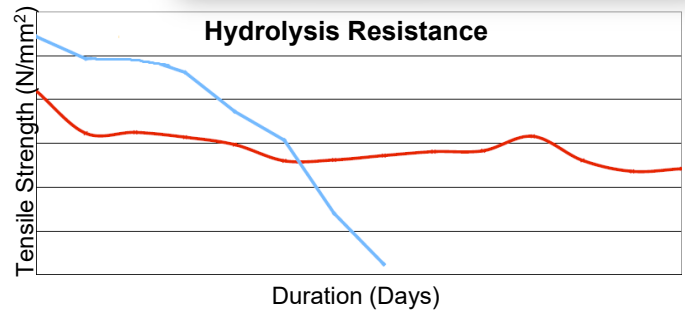

## Advantages

- Virtually crush proof
- Non-corrosive
- Thin, lightweight, yet strong
- Withstands high hydrostatic pressure
- Synthetic strength members for higher strength and lower weight

CONTACT LINDEN FOR DRAWINGS, SPECIFICATIONS OR CUSTOM REQUIREMENTS

## Specifications

Spec No.	Part No.	OD (mm)	Fiber Type	Conductor	UTS (lbs)
<b>1 x Singlemode (SM)</b>					
<a href="#">LINDEN-SPE-7136</a>	1-FO-2-CU-BB-120-22759	3	1 x SM	2 x #22	N/A
<a href="#">LINDEN-SPE-7373</a>	1-FO-6-CU-O-11-Q-135	3.2	1 x SM	6 x #26	450
<a href="#">LINDEN-SPE-7148*</a>	1-FO-2-CU-O-10-FQ-146-YEL	3.7	1 x SM	2 x #28	450
<a href="#">LINDEN-SPE-7587</a>	1-FO-2-CU-O-126-Q-166	4.2	1 x SM	2 x #22	500
<a href="#">LINDEN-SPE-7149*</a>	1-FO-2-CU-O-10-FQ-192-YEL	4.9	1 x SM	2 x #24	450
<a href="#">LINDEN-SPE-7218*</a>	1-FO-2-CU-O-10-FQ-192-YEL-95A	4.9	1 x SM	2 x #24	450
<a href="#">LINDEN-SPE-7221*</a>	1-FO-2-CU-O-10-FMM-192-YEL	4.9	1 x SM	2 x #24	450
<a href="#">LINDEN-SPE-7623*</a>	1-FO-2-CU-O-136-FQ-210	5.3	1 x SM	2 x #24	1,400
<a href="#">LINDEN-SPE-7290</a>	1-FO-2-CU-O-171-FQ-211	5.4	1 x SM	2 x #16	250
<a href="#">LINDEN-SPE-7170</a>	1-FO-4-CU-S-138-O-168-L-228	5.8	1 x SM	4 x #22	450



Spec No.	Part No.	OD (mm)	Fiber Type	Conductor	UTS (lbs)
<a href="#">LINDEN-SPE-7567*</a>	1-FO-2-CU-O-151-FQ-240	6.1	1 x SM	2 x #22	1,600
<a href="#">LINDEN-SPE-7104</a>	1-FO-2-CU-O-155-Q-250	6.4	1 x SM	2 x #20	880
<a href="#">LINDEN-SPE-7161*</a>	1-FO-3-CU-O-150-FQ-250	6.35	1 x SM	1 x #20 (TP) & #28	1,600
<a href="#">LINDEN-SPE-7195*</a>	1-FO-2-CU-O-150-FQ-250	6.35	1 x SM	2 x #20	1,600
<a href="#">LINDEN-SPE-7326</a>	1-FO-3-CU-O-150-FQ-250-NN-295	7.5	1 x SM	2 x #20 & 1 x #28 DW	1,600
<a href="#">LINDEN-SPE-7481</a>	1-FO-8-CU-NN-200-O-205-Q-315	8.0	1 x SM	3 x #24 & 1 x #24 TP	300
<a href="#">LINDEN-SPE-7141*</a>	1-FO-8-CU-O-235-FQ-323	8.2	1 x SM	8 x #26	1,500
<a href="#">LINDEN-SPE-7248*</a>	1-FO-6-CU-O-197-FQ-338	8.6	1 x SM	2 x #20, 2 x #24 TP	200
<a href="#">LINDEN-SPE-7153*</a>	1-FO-2-CU-O-263-FQ-362	9.2	1 x SM	2 x #20 TP	1,600
<a href="#">LINDEN-SPE-7558</a>	1-FO-3-CU-T-320-Q-400	10.2	1 x SM	2 x #14 + 1 x #14 DW	800
<a href="#">LINDEN-SPE-7128*</a>	1-FO-2-CU-O-312-FQ-412	10.5	1 x SM	2 TP x #22	5,000
<a href="#">LINDEN-SPE-7386*</a>	1-FO-2-CU-X-288O-288-FQ-434	11.0	1 x SM	2 x #17 & 1 x #26 DW	1,200
<a href="#">LINDEN-SPE-7131*</a>	1-FO-5-CU-O-260-FQ-460	11.7	1 x SM	5 x #18	1,100
<a href="#">LINDEN-SPE-7570*</a>	1-FO-4-CU-O-186-FQ-440-Q-480	12.2	1 x SM	1 x #16 TP + 1 x 24 TP	300
<a href="#">LINDEN-SPE-7110*</a>	1-FO-3-CU-Q-328-R-500	13	1 x SM	3 x #16	450
<a href="#">LINDEN-SPE-7526</a>	1-FO-2-CU-O-225-FQ-540	13.7	1 x SM	2 x #13	1,466
<a href="#">LINDEN-SPE-7480</a>	1-FO-12-CU-O-287-FQ-550	14	1 x SM	12 x #22	1,000
<a href="#">LINDEN-SPE-7194*</a>	1-FO-2-CU-O-420-FQ-1036	26.3	1 x SM	2 x #8	1,250
<b>2 x Singlemode (SM)</b>					
<a href="#">LINDEN-SPE-7536</a>	2-FO-5-CU-O-115-Q-135	3.4	2 x SM	5 x #26	450
<a href="#">LINDEN-SPE-7568</a>	2-FO-2-CU-O-116-J-156	4.0	2 x SM	2 x #22	675
<a href="#">LINDEN-SPE-7277</a>	2-FO-2-CU-O-171-FQ-211	5.4	2 x SM	2 x #16	250
<a href="#">LINDEN-SPE-7152*</a>	2-FO-2-CU-O-155-Q-215	5.5	2 x SM	2 x #24	2,100
<a href="#">LINDEN-SPE-7345</a>	2-FO-2-CU-O-197-OO-260	5.5	2 x SM (LT)	2 x #16	2,400
<a href="#">LINDEN-SPE-7107*</a>	2-FO-2-CU-O-155-Q-235	6	2 x SM	2 x #24	2,100
<a href="#">LINDEN-SPE-7311</a>	2-FO-3-CU-O-173-Q-252	6.4	2 x SM	3 x #20	250
<a href="#">LINDEN-SPE-7601</a>	2-FO-2-CU-O-190-Q-270	6.8	2 x SM	2 X #14	450
<a href="#">LINDEN-SPE-7572</a>	2-FO-2-CU-O-164-L-275	7.0	2 x SM	2 x #24	450
<a href="#">LINDEN-SPE-7189*</a>	2-FO-2-CU-O-150-FQ-278	7.1	2 x SM	1 x #20 TP & 1 x #28 DW	1,600
<a href="#">LINDEN-SPE-7327</a>	2-FO-3-CU-O-150-FQ-250-NN-295	7.9	2 x SM	1 x #20 TP & 1 x #28 DW	3,200
<a href="#">LINDEN-SPE-7120</a>	2-FO-3-CU-O-280-Q-320	8.1	2 x SM	3 x #22	5,500
<a href="#">LINDEN-SPE-7138*</a>	2-FO-2-CU-O-225-FQ-330	8.4	2 x SM	2 x #18	1,000
<a href="#">LINDEN-SPE-7164</a>	2-FO-2-CU-O-207-Q-337	8.6	2 x SM	2 x #20	2,400
<a href="#">LINDEN-SPE-7585</a>	2-FO-2-CU-O-242-Q-342	8.7	2 x SM (LT)	2 x #14 + 1 x #16	2,000
<a href="#">LINDEN-SPE-7512*</a>	2-FO-2-CU-NN-138-O-158-X-223-FQ-352	9.0	2 x SM (LT)	2 x #22	700
<a href="#">LINDEN-SPE-7177</a>	2-FO-5-CU-O-246-Q-366	9.3	2 x SM (LT)	4 x #18 & 1 x #24 STP	1,760
<a href="#">LINDEN-SPE-7122</a>	2-FO-2-CU-O-155-Q-390	9.9	2 x SM	2 x #16	2,200
<a href="#">LINDEN-SPE-7355</a>	2-FO-2-CU-Q-138-O-320-B-390	9.9	2 x SM (LT)	2 x #24	16,000
<a href="#">LINDEN-SPE-7123</a>	2-FO-2-CU-T-320-Q-400	10.2	2 x SM	2 x #14	800
<a href="#">LINDEN-SPE-7468</a>	2-FO-3-CU-O-388-FQ-400	10.2	2 x SM (LT)	2 x #16 & 2 x #18	1,000
<a href="#">LINDEN-SPE-7103</a>	2-FO-2-CU-O-155-Q-420	10.7	2 x SM	4 x #13	1,300
<a href="#">LINDEN-SPE-7469*</a>	2-FO-3-CU-O-388-FQ-400-S-430	10.9	2 x SM (LT)	2 x #16 & 1 x #18	1,000
<a href="#">LINDEN-SPE-7618*</a>	2-FO-2-CU-O-237-FKK-440	11.2	2 x SM	2 x #14	1,100
<a href="#">LINDEN-SPE-7293</a>	2-FO-2-CU-O-388-Q-448	11.4	2 x SM	2 x #12	4,000
<a href="#">LINDEN-SPE-7462</a>	2-FO-6-CU-O-352-Q-452	11.5	2 x SM (LT)	6 x #18	10,000
<a href="#">LINDEN-SPE-7227</a>	2-FO-6-CU-X-297-O-327-DD-470-ORN	12	2 x SM	4 x #16, 2 x #24 TP	5,000
<a href="#">LINDEN-SPE-7500*</a>	2-FO-5-CU-O-217-FQ-442-Q-472	12	2 x SM LT	4 x 20, 1 x 28 D & 1 x 28 S	1,600
<a href="#">LINDEN-SPE-7313</a>	2-FO-2-CU-Q-138-O-320-B-475	12.1	2 x SM	2 x #14	800
<a href="#">LINDEN-SPE-7178*</a>	2-FO-5-CU-O-246-M-405-Q-484	12.3	2 x SM LT	4 x #18, #24STP	1,760
<a href="#">LINDEN-SPE-7100*</a>	2-FO-2-CU-O-155-Q-500	12.7	2 x SM	2 x #14	2,100
<a href="#">LINDEN-SPE-7619*</a>	2-FO-3-CU-O-476-FQ-520	13.2	2 x SM (LT)	#14 + #16	1,000
<a href="#">LINDEN-SPE-7291</a>	2-FO-2-CU-NN-216-Z-422-S-530	13.5	2 x SM	2 x #16	12,000
<a href="#">LINDEN-SPE-7241*</a>	2-FO-4-CU-O-55-S-65-FQ-535-ORN	13.6	2 x SM	4 x #16	3,200
<a href="#">LINDEN-SPE-7106*</a>	2-FO-4-CU-O-155-Q-550	13.9	2 x SM	4 x #20	1,573
<a href="#">LINDEN-SPE-7109</a>	2-FO-5-CU-O-155-Q-550	13.9	2 x SM	5 x #16	15,400
<a href="#">LINDEN-SPE-7222</a>	2-FO-4-CU-S-280-O-450-S-550	14	2 x SM	4 x #20	11,000
<a href="#">LINDEN-SPE-7292</a>	2-FO-2-CU-JJ-415-Q-550	14	2 x SM	2 x #16	29,000
<a href="#">LINDEN-SPE-7603*</a>	2-FO-4-CU-P-266-O-299-FKK-550	14	2 x SM (LT)	2 x #16	3,000
<a href="#">LINDEN-SPE-7125*</a>	2-FO-2-CU-Q-557	14.1	2 x SM	2 x #16	1,200
<a href="#">LINDEN-SPE-7465*</a>	1-FO-6-CU-O-273-FQ-530	14.6	2 x SM	6 x #18	2,000
<a href="#">LINDEN-SPE-7228*</a>	2-FO-2-CU-365-FQ-585-YEL	14.9	2 x SM	2 x #16	2,200
<a href="#">LINDEN-SPE-7354</a>	2-FO-5-CU-Q-322-T-500-B-600	15.25	2 x SM (LT)	5 x #16	14,000
<a href="#">LINDEN-SPE-7501*</a>	2-FO-4-CU-NN-332-O-344-FQ-650	16.5	2 x SM	4 x #14	1,250
<a href="#">LINDEN-SPE-7233*</a>	2-FO-2-CU-O-397-FQ-617-YEL	15.7	2 x SM	2 x #16	2,600
<a href="#">LINDEN-SPE-7139</a>	2-FO-4-CU-S-377-T-525-GG-620	15.7	2 x SM	4 x #16	12,320
<a href="#">LINDEN-SPE-7276*</a>	2-FO-6-CU-X-358-O-398-FQ-628-YEL	16	2 x SM	4 x #18, 1 x #22 STP	3,200
<a href="#">LINDEN-SPE-7262*</a>	2-FO-6-CU-O-155-FQ-638-ORN	16.2	2 x SM (LT)	4 x #16, 2 x #24TP	5,000
<a href="#">LINDEN-SPE-7249*</a>	2-FO-5-CU-X-252-0282-FQ-674-ORN	17.11	2 x SM	4 x #16, 1 x #28 TP	3,200
<a href="#">LINDEN-SPE-7126</a>	2-FO-12-CU-T-535-FQ-709	18	2 x SM	2 x #14, 10 x #23 TP	3,600
<a href="#">LINDEN-SPE-7111*</a>	2-FO-3-CU-S-730	18.5	2 x SM (LT)	3 x #18	2,200
<a href="#">LINDEN-SPE-7252*</a>	2-FO-4-CU-M-496-O-536-FQ-800-ORN	20.3	2 x SM (LT)	4 x #18	2,300



Spec No.	Part No.	OD (mm)	Fiber Type	Conductor	UTS (lbs)
<b>3 x Singlemode (SM)</b>					
<a href="#">LINDEN-SPE-7162*</a>	3-FO-1-CU-O-175-FQ-275	7.0	3 x SM	1 x #20 (TP)	1,600
<a href="#">LINDEN-SPE-7350</a>	3-FO-2-CU-O-164-L-275	7.0	3 x SM	2 x #24	450
<a href="#">LINDEN-SPE-7142</a>	3-FO-2-CU-O-20-Q-367	9.3	3 x SM	2 x #14	1,500
<a href="#">LINDEN-SPE-7166</a>	3-FO-2-CU-O-325-Q-415-YEL	10.5	3 x SM	2 x #12	1,200
<a href="#">LINDEN-SPE-7596</a>	3-FO-5-CU-P-318-O-355-Q-429	10.9	3 x SM (LT)	3 x #16	4,000
<a href="#">LINDEN-SPE-7595</a>	3-FO-2-CU-O-260-FKK-450	11.4	3 x SM	2 x #14	1,500
<a href="#">LINDEN-SPE-7160*</a>	3-FO-4-CU-O-322-FQ-475-Q-511-YEL	13	3 x SM	2 x #20	1,600
<a href="#">LINDEN-SPE-7395</a>	3-FO-3-CU-S-289-O-413-NN-443-B-540	13.7	3 x SM	3 x #20	14,000
<a href="#">LINDEN-SPE-7251</a>	3-FO-4-CU-O-585-Q-685	17.4	3 x SM	2 x #6, 2 x #9	3,500
<a href="#">LINDEN-SPE-7113</a>	3-FO-3-CU-O-630-DD-770	19.6	3 x SM	3 x #16	35,200
<a href="#">LINDEN-SPE-7237</a>	3-FO-7-CU-Q-590-O-760-Q-858-YEL	21.8	3 x SM	7 x #10	11,000
<a href="#">LINDEN-SPE-7231*</a>	3-FO-4-CU-O-764-FQ-923-BLK	23.4	3 x SM	3 x #11, 1 x #20 TP	15,500
<b>4 x Singlemode (SM)</b>					
<a href="#">LINDEN-SPE-7466</a>	1-FO-3-CU-PP-O-250-Q-310	7.9	4 x SM (LT)	3 x #14 & Coax	750
<a href="#">LINDEN-SPE-7391*</a>	4-FO-2-CU-O-208-FQ-350	8.9	4 x SM (LT)	2 x #16	1,100
<a href="#">LINDEN-SPE-7514*</a>	4-FO-6-CU-O-207-FQ-352	9.0	4 x SM (LT)	4 x #24 + 2 x #30	1,540
<a href="#">LINDEN-SPE-7539*</a>	4-FO-4-CU-O-218-L-325-Q-375	9.5	4 x SM (LT)	2 x #20 + 1 x #28 TP	1,100
<a href="#">LINDEN-SPE-7507*</a>	1-FO-5-CU-O-230-FQ-390	9.9	4 x SM (LT)	4 x #20	1,100
<a href="#">LINDEN-SPE-7617</a>	1-FO-5-CU-O-289-Q-389	9.9	4 x SM (LT)	2 x #18, 2 x #24 TP, 1 x #18	3,500
<a href="#">LINDEN-SPE-7582</a>	4-FO-5-CU-O-225-L-360-Q-410	10.4	4 x SM (LT)	2 x #20 + 3 x #28 TP	1,100
<a href="#">LINDEN-SPE-7529</a>	4-FO-10-CU-O-261-X-361-Q-411	10.5	4 x SM (LT)	10 x #22	2,500
<a href="#">LINDEN-SPE-7167</a>	4-FO-2-CU-O-327-Q-417-YEL	10.6	4 x SM	2 x #12	1,200
<a href="#">LINDEN-SPE-7206</a>	4-SM-10-CU-Q-439	11.2	4 x SM	10 x #18	-
<a href="#">LINDEN-SPE-7392*</a>	4-FO-2-CU-O-230-FQ-450	11.4	4 x SM (LT)	2 x #14	1,100
<a href="#">LINDEN-SPE-7522</a>	4-FO-5-CU-O-371-Q-451	11.5	4 x SM (LT)	3 x #10 + 1 x #12	250
<a href="#">LINDEN-SPE-7163</a>	4-FO-4-CU-O-55-FQ-457-ORN	11.6	4 x SM (LT)	2 x #18, 2 x #22, 2 x #24	3,200
<a href="#">LINDEN-SPE-7124*</a>	4-FO-4-CU-O-55-S-65-FQ-470	11.93	4 x SM (LT)	2 x #18, 2 x #22, 2 x #24	3,200
<a href="#">LINDEN-SPE-7199*</a>	4-FO-4-CU-O-55-S-65-FQ-470	11.93	4 x SM (LT)	2 x #18, 2 x #22, 1 x #24	3,200
<a href="#">LINDEN-SPE-7363</a>	4-FO-4-CU-O-55-S-65-S-460	11.96	4 x SM (LT)	2 x #18, 2 x #22, 1 x #24	3,200
<a href="#">LINDEN-SPE-7102</a>	4-FO-4-CU-O-155-DD-470	12.0	4 x SM	4 x #16	5,500
<a href="#">LINDEN-SPE-7261*</a>	4-FO-6-CU-O-55-S-65-FQ-480-ORN	12.2	4 x SM (LT)	2 x #18, 2 x #22, 2 x #24	3,200
<a href="#">LINDEN-SPE-7151*</a>	4-FO-4-CU-S-287-O-387-FQ-547	13.9	4 x SM	4 x #20	5,500
<a href="#">LINDEN-SPE-7143</a>	4-FO-4-CU-S-280-O-450-S-550	14.0	4 x SM	4 x #20	11,000
<a href="#">LINDEN-SPE-7621</a>	1-FO-6-CU-Q-446-O-500-Q-560	14.2	4 x SM (LT)	6 x #12	8,000
<a href="#">LINDEN-SPE-7330*</a>	4-FO-6-CU-O-55-S-70-FQ-600	15.25	4 x SM (2 x LT)	4 x #19, 1 x #24, 1 x #22	5,000
<a href="#">LINDEN-SPE-7325</a>	4-FO-6-CU-O-55-S-75-MM-590	15.0	4 x SM (2 x LT)	4 x #19, 1 x #24, 1 x #22	6,000
<a href="#">LINDEN-SPE-7303</a>	4-FO-7-CU-O-350-FQ-610-YEL	15.5	4 x SM (LT)	7 x #18	4,800
<a href="#">LINDEN-SPE-7219*</a>	4-FO-6-CU-O-55-S-75-FQ-590-ORN	15.0	4 x SM (LT)	4 x #18, 1 x #22, 1 x #24	6,000
<a href="#">LINDEN-SPE-7101</a>	4-FO-4-CU-O-175-Q-650	16.5	4 x SM	4 x #16	23,100
<a href="#">LINDEN-SPE-7516</a>	4-FO-7-CU-S-344-O-383-FQ-570-Q-650	16.5	4 x SM (LT)	6 x #24 + 1 x #24 STP	4,500
<a href="#">LINDEN-SPE-7108*</a>	4-FO-8-CU-O-155-Q-910	23.1	4 x SM	8 x #18	15,400
<a href="#">LINDEN-SPE-7471</a>	4-FO-4-CU-S-787-W-890-S-1023	26	4 x SM	4 x #4	25,800
<b>5 or more x Singlemode (SM)</b>					
<a href="#">LINDEN-SPE-7308</a>	5-FO-2-CU-Q-248	6.3	5 x SM	2 x #18	-
<a href="#">LINDEN-SPE-7602</a>	6-FO-2-CU-O-208-Q-288	7.3	6 x SM	2 x #14	450
<a href="#">LINDEN-SPE-7605</a>	6-FO-2-CU-O-206-Q-300	7.8	6 x SM (LT)	2 x #16	500
<a href="#">LINDEN-SPE-7250</a>	8-FO-4-CU-O-236-Q-332	8.43	8 x SM	4 x #16	450
<a href="#">LINDEN-SPE-7121</a>	12-FO-8-CU-Q-350	8.9	12 x SM	8 x #18	-
<a href="#">LINDEN-SPE-7515</a>	24-FO-5-CU-NN-274-Q-374	9.5	24 x SM	4 x #20 + 1 x #24 TP	1,600
<a href="#">LINDEN-SPE-7255</a>	6-FO-6-CU-O-336-B-480-BLK	12.2	6 x SM	6 x #18	13,800
<a href="#">LINDEN-SPE-7348</a>	8-FO-2-CU-Q-223-O-583-Q-710	18.0	8 x SM (LT)	2 x #18	30,000
<a href="#">LINDEN-SPE-7349</a>	8-FO-2-CU-Z-786-S-930	23.6	8 x SM (LT)	2 x #6	21,500
<b>Singlemode (SM) &amp; Multimode (MM)</b>					
<a href="#">LINDEN-SPE-7533</a>	4-FO-3-CU-PP-O-252-Q-320	8.1	4 x MM (LT)	3 x #14	750
<a href="#">LINDEN-SPE-7333</a>	8-FO-4-CU-O-238-L-332	8.43	8 x MM (LT)	4 x #16	450
<a href="#">LINDEN-SPE-7295</a>	2-FO-3-CU-O-266-Q-326-ORN	8.3	2 x MM	3 x #18	250
<a href="#">LINDEN-SPE-7531</a>	3-FO-3-CU-PP-O-252-Q-354	9.0	3 x MM	3 x #14	750
<a href="#">LINDEN-SPE-7532*</a>	4-FO-4-CU-P-255-O-274-FQ-377-Q-535	13.6	2 x SM + 2 x MM		
<a href="#">LINDEN-SPE-7332</a>	8-FO-4-CU-Q-472-O-531-Q-610	15.5	4 x SM & 4 x MM	4 x #28	3,400
<a href="#">LINDEN-SPE-7127</a>	4-FO-6-CU-Q-410-Q-760	19.3	3xSM & 1xMM	6 x #20	15,400
<a href="#">LINDEN-SPE-7112*</a>	4-FO-4-CU-S-1210	30.7	2xSM + 2xMM	4 x #15	3,934

\*Denotes Buoyant Design



*AVNOC*  
*Avionic Cable*  
Simple Design  
Improved Performance



# AVNOC


Linden's avionic grade fiber optic cables are designed for the most rigorous avionic environment. AVNOC™ is built to survive the perils of aircraft confines such as high temperature, large temperature variations, high vibration and extreme flexing. Using our patented cable jacket construction designed to protect the fiber from harsh mechanical conditions; our cables are stronger, lighter and smaller than existing flight qualified cables.



## Features

- Meets AS5382
- Simple 3-layer extruded construction
- High temperature
- Lighter design
- Bend insensitive 9µm singlemode
- 50µm multimode version
- Eliminates need for carbon coated fiber

Aging Comparison, LCP v. Carbon (1" Mandrel)

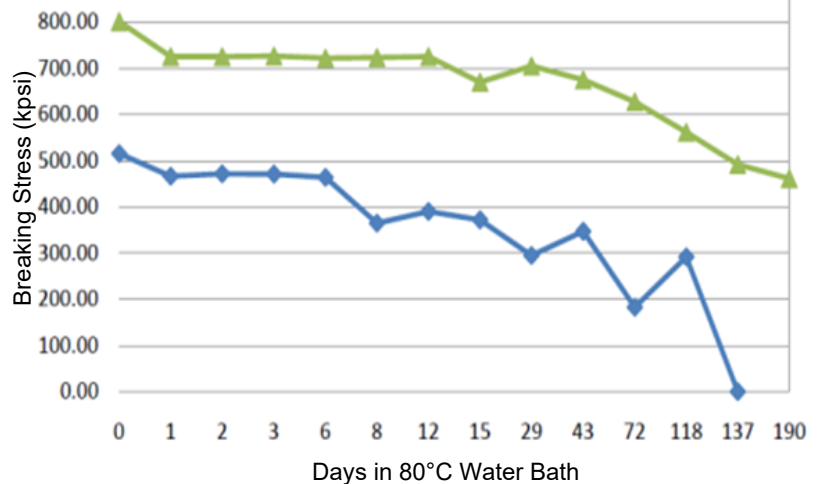

## Advantages

- No Kevlar
- Non-Wicking
- Crush Resistant
- Non-Kink
- Easier to terminate
- Better fatigue performance than carbon coated fibers




### Singlemode


Spec No.	Part No.	Fiber Type	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
<a href="#">LINDEN-SPE-7033</a>	1-XX-A-27-M-66	SM Draka BendBright Elite HTA	1.7	1.5	1.4	45	3.1

### Multimode

Spec No.	Part No.	Fiber Type	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1310nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
<a href="#">LINDEN-SPE-7041</a>	1-YY-A-27-M-66	Draka BendBright MaxCap OM3 HTA (50/125)	1.7	6	4	45	3.1

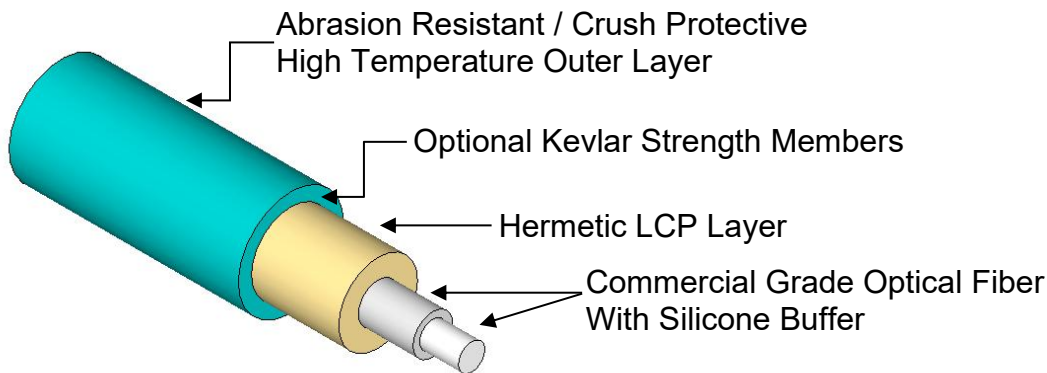

CONTACT LINDEN FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS

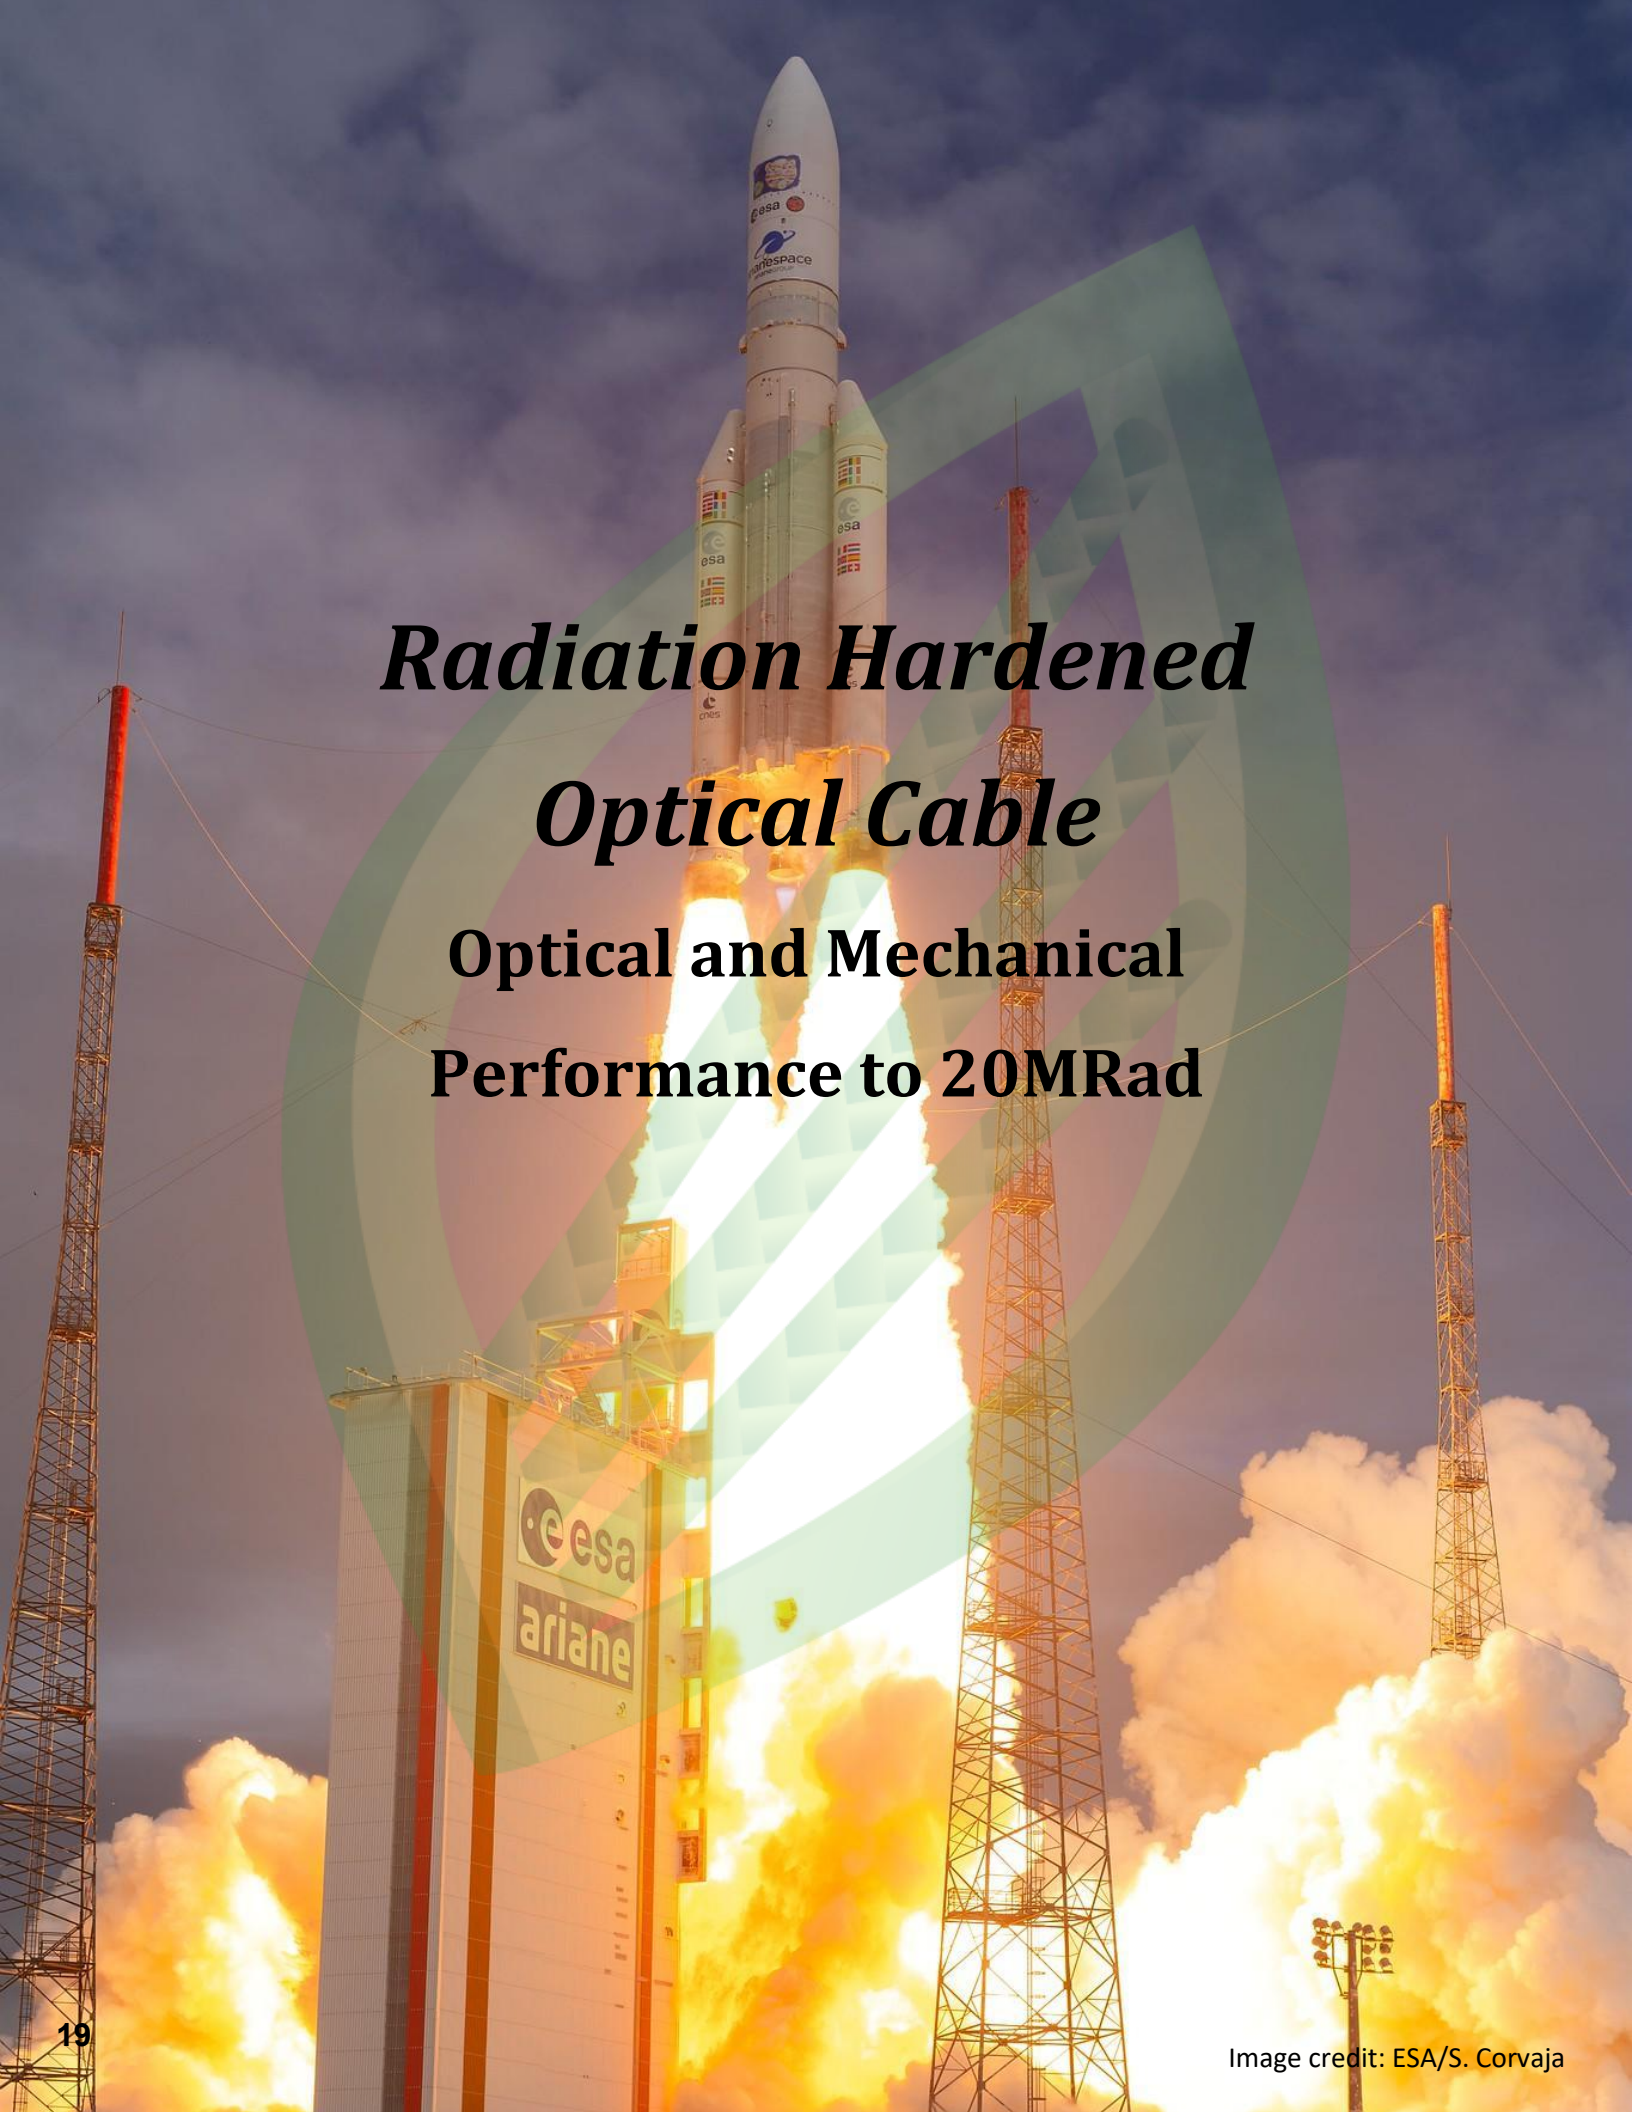A photograph of an Ariane 5 rocket being launched from the Guiana Space Centre. The rocket is ascending vertically, leaving a large, bright plume of fire and white smoke. The launch pad is visible at the bottom, with the ESA and Ariane logos on the service structure. Several tall, slender service towers are positioned around the launch pad. The sky is a mix of blue and orange, suggesting a sunset or sunrise. A large, semi-transparent green geometric pattern is overlaid on the center of the image.

***Radiation Hardened  
Optical Cable***  
**Optical and Mechanical  
Performance to 20MRad**



# Radiation Hardened


Linden's RadHard fiber optic cables provide a complete solution where a robust fiber optic link is needed in a harsh, high radiation environment. A wide variety of cable constructions are available to meet your specific requirements including our patented Non-Kink™ cable.

Tested as per European Space Agency - ESCC Basic Specification No. 2263010




## Features

- Maintain optical and mechanical performance to >20MRad
- Tested to ESCC Spec No. 2263010
- Tested to NASA-STD-8739.5
- Tested to SAE AS5382
- No carbon layer needed

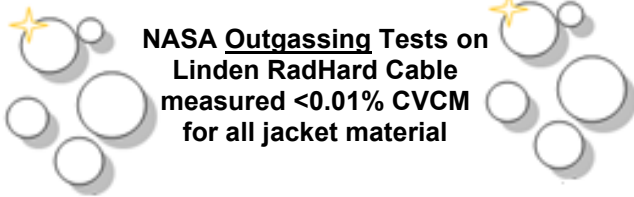

**NASA Outgassing Tests on Linden RadHard Cable measured <0.01% CVM for all jacket material**

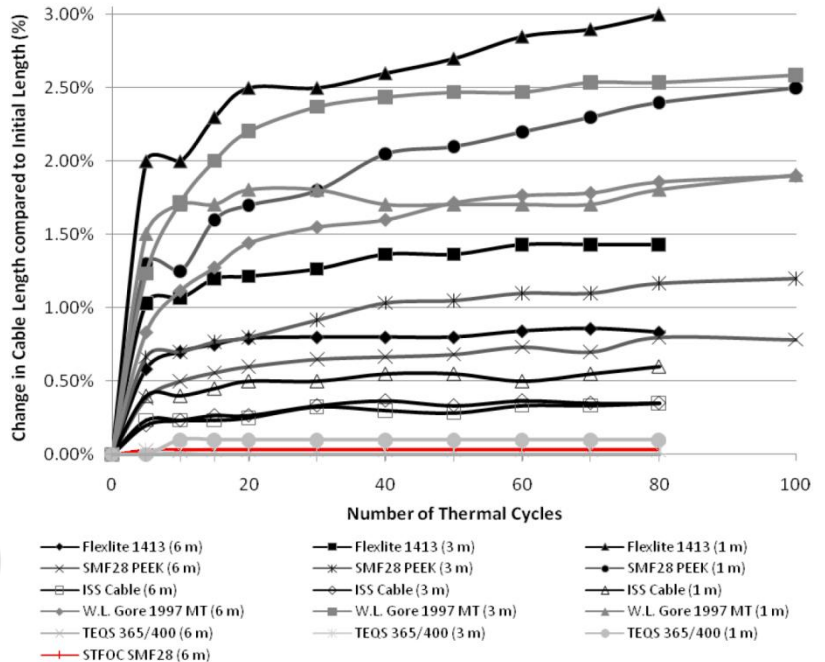

## Advantages

- No Kevlar
- Thermally stable
- Preconditioning prevents jacket shrinkage
- Crush Resistant
- Non-Kink



### Singlemode


Spec No.	Part No.	Fiber Type	OD (mm)	Typical Connector Loss (dB)	Tensile Strength (lbs)
<a href="#">LINDEN-SPE-7079</a>	1-M-A-27-J-65-YEL	RadHard Singlemode	1.65	<0.2dB	50
<a href="#">LINDEN-SPE-7208</a>	1-M-A-27-J-79-YEL	RadHard Singlemode	2.0	<0.2dB	50
<a href="#">LINDEN-SPE-7209</a>	1-M-A-27-J-87-YEL	RadHard Singlemode	2.2	<0.2dB	50
<a href="#">LINDEN-SPE-7068</a>	1-EE-A-27-J-65	RadHard Polyimide	1.65	<0.2dB	45
<a href="#">LINDEN-SPE-7216</a>	1-EE-A-27-J-79	RadHard Polyimide	2.0	<0.2dB	45
<a href="#">LINDEN-SPE-7217</a>	1-EE-A-27-J-87	RadHard Polyimide	2.2	<0.2dB	45

### Multimode

Spec No.	Part No.	Fiber Type	OD (mm)	Typical Connector Loss (dB)	Tensile Strength (lbs)
<a href="#">LINDEN-SPE-7088</a>	1-N-A-27-J-35-ORN	RadHard MM (50/125)	.900	<0.2dB	50
<a href="#">LINDEN-SPE-7210</a>	1-N-A-27-J-65-ORN	RadHard MM (50/125)	1.65	<0.2dB	50
<a href="#">LINDEN-SPE-7211</a>	1-N-A-27-J-79-ORN	RadHard MM (50/125)	2.0	<0.2dB	50
<a href="#">LINDEN-SPE-7212</a>	1-N-A-27-J-87-ORN	RadHard MM (50/125)	2.2	<0.2dB	50
<a href="#">LINDEN-SPE-7081</a>	1-O-A-27-J-19-65	RadHard MM (62.5/125)	1.65	<0.2dB	50
<a href="#">LINDEN-SPE-7213</a>	1-O-A-27-J-79-ORN	RadHard MM (62.5/125)	2.0	<0.2dB	50
<a href="#">LINDEN-SPE-7214</a>	1-O-A-27-J-87-ORN	RadHard MM (62.5/125)	2.2	<0.2dB	50
<a href="#">LINDEN-SPE-7346</a>	12-SM-O-U-114	RadHard MM (50/125)	2.9	<0.2dB	60

### Singlemode & Multimode

Spec No.	Part No.	Fiber Type	OD (mm)	Typical Connector Loss (dB)	Tensile Strength (lbs)
<a href="#">LINDEN-SPE-7294</a>	4-FO-U-102-O-122-J-137	Two (2) RadHard SM + Two (2) x RadHard MM	3.5	<0.2dB	250

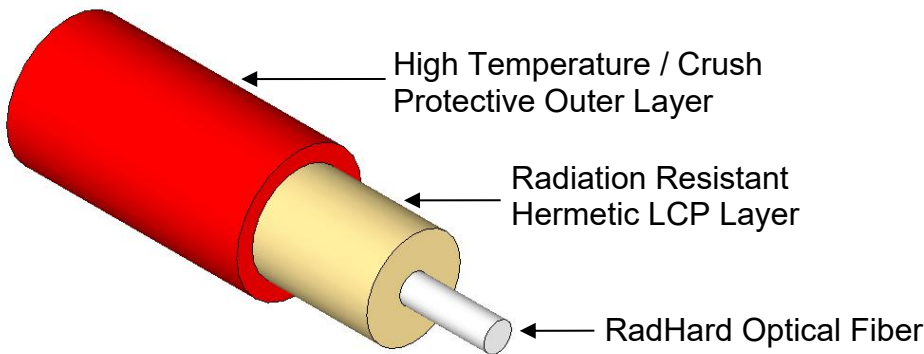

Artemis Launch

CONTACT LINDEN FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS



# *Patchcords*

**SubSea**

**Avionic**

**Space**



# Patchcords

Harsh environment fiber optic patchcords for applications demanding high performance. Whether deep beneath the ocean surface where crush resistance and fish bite protection is imperative, near the surface where buoyancy is needed, in the air, or outer space, Linden keeps you connected. A combination of Linden's patented cable constructions and industry leading interconnect solutions provide a top-notch solution for your connectivity needs.



## Features

- Rugged, durable, patented STFOC™ fiber optic cables
- Hermetic coating protects fiber from moisture/hydrogen/helium
- Crush proof, non-kink cables
- Buoyant/Avionic/High Temperature/RadHard designs
- Thin wall insulation = thinner/lighter cables
- Various connector types available



## Applications

- Subsea
- Surface
- Avionic
- Space





# Ordering Information

AAAA-BBB-CCC-DD A = Cable / B = Connector 1 / C = Connector 2 / D = Length (m)

SubSea – Fiber Type		
7043	Non-Kink Singlemode 1.65mm	<a href="#">LINDEN-SPE-7043</a>
7196	Non-Kink Singlemode 2.00mm	<a href="#">LINDEN-SPE-7196</a>
7044	Non-Kink Multimode (50/125) 1.65mm	<a href="#">LINDEN-SPE-7044</a>
7197	Non-Kink Multimode (50/125) 2.00mm	<a href="#">LINDEN-SPE-7197</a>
7046	Non-Kink Multimode (62.5/125) 1.65mm	<a href="#">LINDEN-SPE-7046</a>
7198	Non-Kink Multimode (62.5/125) 2.00mm	<a href="#">LINDEN-SPE-7198</a>
SubSea - Buoyant – Cable Type		
7036	Buoyant High Strength Singlemode 1.9mm	<a href="#">LINDEN-SPE-7036</a>
7076	Buoyant High Strength Multimode (50/125) 1.9mm	<a href="#">LINDEN-SPE-7076</a>
7093	Buoyant High Strength Multimode (62.5/125) 1.9mm	<a href="#">LINDEN-SPE-7093</a>
7055	Buoyant High Strength Singlemode 3.5mm	<a href="#">LINDEN-SPE-7055</a>
7077	Buoyant High Strength Multimode (50/125) 3.5mm	<a href="#">LINDEN-SPE-7077</a>
7091	Buoyant High Strength Multimode (62.5/125) 3.5mm	<a href="#">LINDEN-SPE-7091</a>
7096	Buoyant Singlemode 900µm	<a href="#">LINDEN-SPE-7096</a>
7207	Buoyant Singlmode 1.10mm	<a href="#">LINDEN-SPE-7207</a>
Avionic – Cable Type		
7033	AVNOC Singlemode 1.6mm	<a href="#">LINDEN-SPE-7033</a>
7041	AVNOC Multimode (50/125) 1.6mm	<a href="#">LINDEN-SPE-7041</a>
Space – Cable Type		
7079	RadHard Singlemode 1.65mm	<a href="#">LINDEN-SPE-7079</a>
7208	RadHard Singlemode 2.00mm	<a href="#">LINDEN-SPE-7208</a>
7210	RadHard Multimode (50/125) 1.65mm	<a href="#">LINDEN-SPE-7210</a>
7211	RadHard Multimode (50/125) 2.00mm	<a href="#">LINDEN-SPE-7211</a>
7213	RadHard Multimode (62.5/125) 2.00mm	<a href="#">LINDEN-SPE-7213</a>
7214	RadHard Multimode (62.5/125) 2.20mm	<a href="#">LINDEN-SPE-7214</a>

## Connector Type

SubSea		Surface	
LF1	FC-DRY HP Singlemode	TF1	FC/PC
LF2	FC-DRY HP Multimode (50/125)	TF2	FC/APC
LF3	FC-DRY HP Multimode (62.5/125)	SC1	SC/PC
LS1	MIL-SPEC Singlemode	SC2	SC/APC
LS2	MIL-SPEC Multimode (50/125)	TS3	ST
LS3	MIL-SPEC Multimode (62.5/125)	TL1	LC/PC
FS1	Fischer F01 Singlemode	TL2	LC/APC
		MPO	Multi-Fiber Push-on
Avionic/Space – Connector Type			
AV1	Diamond AVIM Singlemode	SF1	Space Qualified FC/PC
AV2	Diamond AVIM Multimode	SF2	Space Qualified FC/APC

**\*\*Other Cable Types and Connectors available upon request\*\***

An aerial photograph of a vast field of wind turbines, stretching far into the distance. The turbines are arranged in neat, parallel rows. A large, semi-transparent green circle is overlaid on the center of the image, highlighting a specific area of the turbine field. The text is centered within this green circle.

***Phase Stabilized STFOC***  
**Cost Effective**





# Phase Stabilized STFOC

Phase Stabilized STFOC is a specialty fiber which minimizes the temperature dependence of transmission delay time. It is used for transmitting base band signals in synchronized measurement systems. The fiber is buffered with Linden Photonics' patented Liquid Crystal Polymer jacketing, a material with negative thermal expansion coefficient. Kevlar strength members are also available.

## Features

- Negative Thermal Coefficient of Delay (TCD) Available

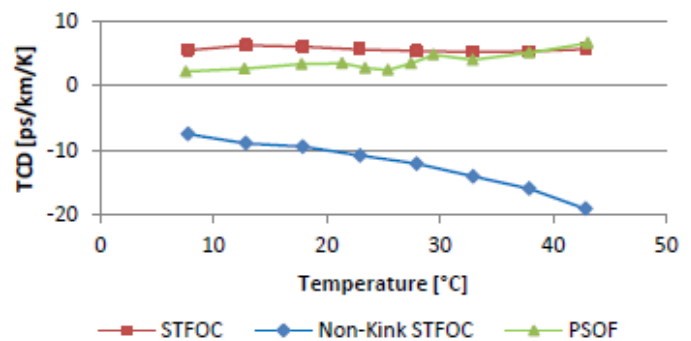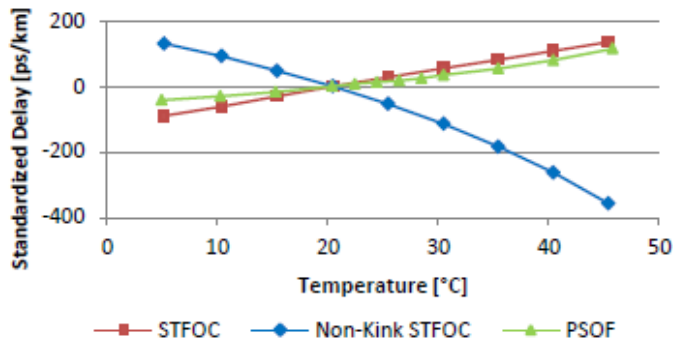


\*NEW PHASE STABLE OPTICAL FIBER, M. Bousonville, et al, 2012

(<http://accelconf.web.cern.ch/accelconf/BIW2012/papers/mopg033.pdf>)

## Advantages

STFOC shows excellent thermal stability. The *Non-Kink STFOC* version is the first known cable which shows a negative Thermal Coefficient of Delay (TCD).

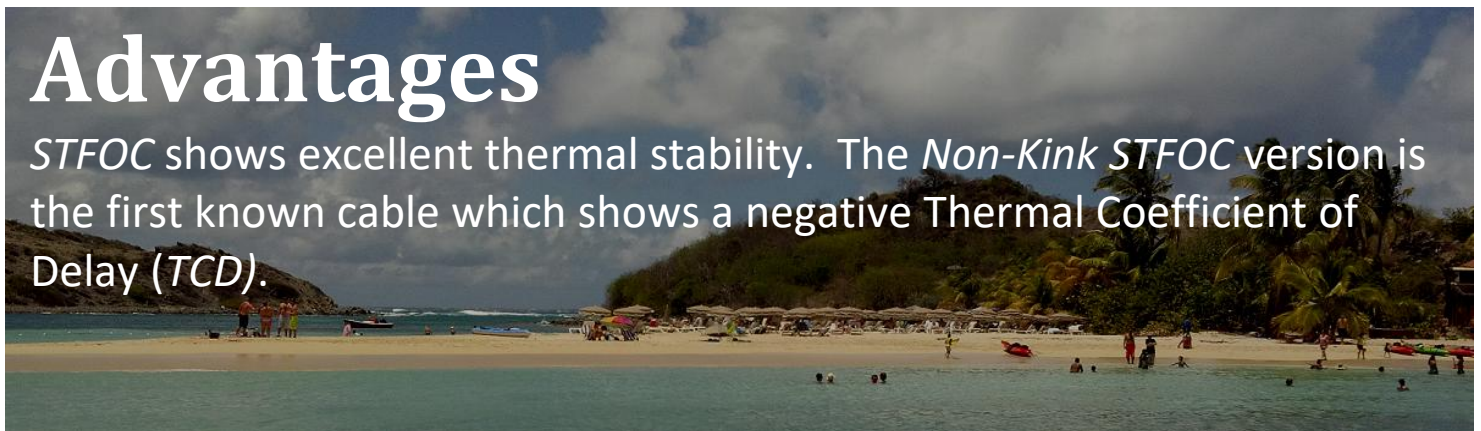





### Single-Channel

Spec No.	Part No.	Fiber Type	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	TCD Value (ps/°C/km)
<a href="#">LINDEN-SPE-7193</a>	1-SM-A-27-B-30-TCD	Singlemode	0.762	0.45	0.35	50	~ 10
<a href="#">LINDEN-SPE-7192</a>	1-SM-A-27-O-47-L-75-TCD	Singlemode	1.9	0.45	0.35	250	~ -10


### Multi-Channel

Spec No.	Part No.	Fiber Count	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	TCD Value (ps/°C/km)
<a href="#">LINDEN-SPE-7483</a>	30-7193-O-383-B-463-S-543	30 x SM	13.8	0.60	0.60	1,000	~ 10
<a href="#">LINDEN-SPE-7484</a>	10-7193-O-169-B-249-S-329	10 x SM	8.35	0.60	0.60	1,000	~ 10
<a href="#">LINDEN-SPE-7485</a>	4-7193-O-107-B-187-S-267	4 x SM	6.8	0.60	0.60 </td <td>1,000</td> <td>~ 10</td>	1,000	~ 10

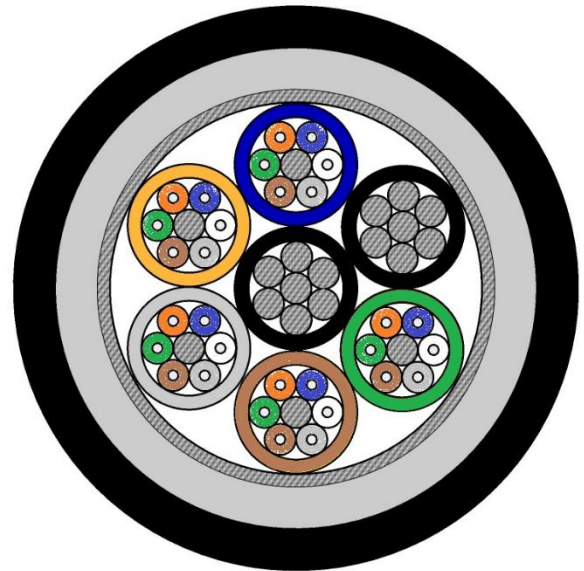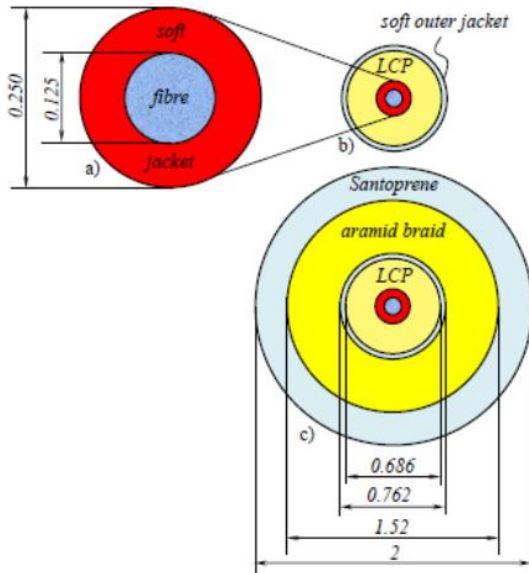

\*NEW PHASE STABLE OPTICAL FIBER, M. Bousonville, et al, 2012  
<http://accelconf.web.cern.ch/accelconf/B IW2012/papers/mopg033.pdf>

Multi-Channel Designs Available

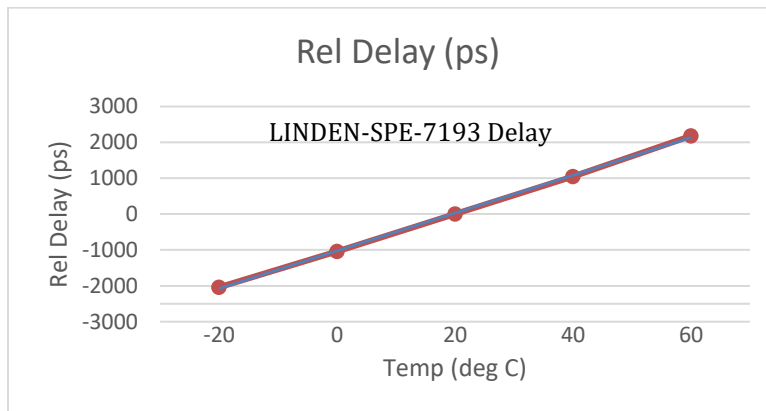

CONTACT LINDEN FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS




# ***Precision Wound Spools***

**Tangle Free**

**Internal Deployment**

# PRECISION WOUND PACKS

These precision-wound optical fiber packs are designed for use in mission critical applications like subsea munitions and aerial drones. They provide a capability for a secure, non-jammable two-way, high-bandwidth communication link.

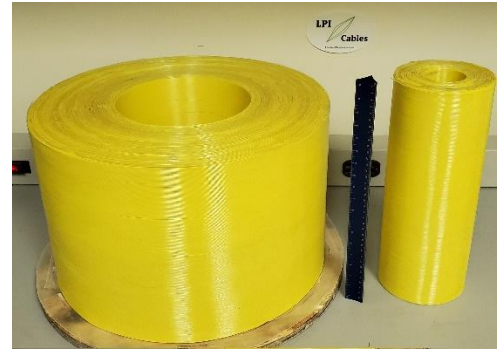

Fiber optic links can be bare fiber, buffered fiber or Strong Tether Fiber Optic Cable (STFOC™). These spools are for slow, low tension payout or high-speed rapid payout. Fiber pays out in such a manner that the spool remains stationary during deployment. Precision packs can be designed with singlemode or can be modified with multimode fiber. Linden has delivered packs 30 km in length!

## SUBSEA PACK SIZES - STFOC™ - BSTFOC™


Spool ID	Spool OD	Spool Length	Cable Length	P/N
2"	5"	12"	3.75km	7260-2-5-12
7"	13"	9.5"	20km	7260-7-13-9.5
7"	16"	9.5"	30km	7260-7-16-9.5

## Ordering Information

AAAA-BB-CC-DD A = Cable Type / B= ID (in.) / C = OD (in.) / D = Spool Length (in.)

## FLY BY FIBER – BARE/BUFFERED FIBER

Maintaining a link with your drone in a high EMI environment is critical. Wireless drones can be hacked, jammed and disabled. The solution is long range fiber optic packs. These packs are lightweight, provide high data bandwidth and provide continuous communications Externally deployable spools.

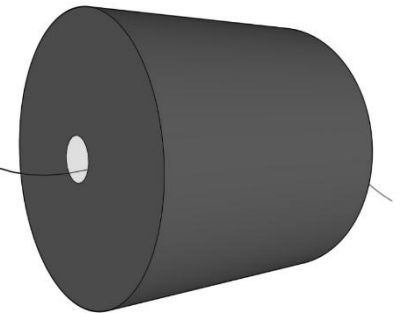

- No radio emissions means operator & drone cannot be located and targeted.
- Easy release does not obstruct drone flight
- High Speed Deployment
- Length up to 25 km

Strong Fiber Cable					
Fiber Length					
Spec No.	Part No.	(km)	L (mm)	OD (mm)	Total Wt (kg)
LINDEN-SPE-7546	SF-5.5-3.5-1	1	140	89	1.20
LINDEN-SPE-7547	SF-5.5-4.5-2	2	140	114	1.60
LINDEN-SPE-7548	SF-5.5-5.2-5	5	260	152	2.80
Bare Fiber					
Fiber Length					
Spec No.	Part No.	(km)	L (mm)	OD (mm)	Total Wt (kg)
LINDEN-SPE-7551	BF-2-2.8-1	1	51	73	0.21
LINDEN-SPE-7553	BF-3.5-3.5-5	5	122	89	0.55
LINDEN-SPE-7554	BF-4-4.5-10	10	140	114	1.01
LINDEN-SPE-7555	BF-5-5.5-20	20	200	140	2.10

CONTACT LINDEN FOR DRAWINGS, SPECIFICATIONS OR CUSTOM REQUIREMENTS



***MicroTethers***

**Thin & Lightweight**

**Flexible**

**Power & Optics**



## MicroTethers

Expanding upon our well-known subsea cables, Linden Photonics introduces a line of **MicroTethers** to its product line. Typically small gauge copper and fiber elements are enclosed in a **lightweight** cable designed to provide power and communications to airborne drones or aerostats. Linden can customize your size, weight and strength; from **high-strength** designs intended to provide anchoring for large aerostats in high winds to extremely thin tethers designed for the smallest of drones. Linden's expertise in low density cable jacketing is ideal for this environment. Our cables are compact and rugged; flexible and strong.

## Tethered Drone Features

- **Lightweight:** Designs from 0.007lbs/ft (10.4g/m)
- Designs from 100 to 13,000 lbs work load
- 3-channels in 2.9mm OD
- Designs with or without fiber
- Various power options
- MIL M22759 Tefzel coated wire – up to 1,000V rated
- Braided or extruded jackets



## Advantages

- Highly Flexible
- Thin, lightweight, yet strong
- Reduced cable weight = maximum payload capacity





# Specifications

Spec No.	Part No.	OD (mm)	Fiber Type	Conductor Type	Weight (lbs/1kft)
<b>Lightweight – Drones (fiber optic)</b>					
<a href="#">LINDEN-SPE-7479</a>	2-SM-O-70-BB-100	2.5	1 x LINDEN-SPE-7283	None	3.33
<a href="#">LINDEN-SPE-7513</a>	1-FO-2-CU-O-94-BB-104	2.6	1 x LINDEN-SPE-7034	2 x 28 AWG	4.0
<a href="#">LINDEN-SPE-7441</a>	1-FO-2-CU-EE-105	2.7	1 x LINDEN-SPE-7096	2 x 24 AWG	7.0
<a href="#">LINDEN-SPE-7565</a>	2-FO-2-CU-BB-110	2.8	1 x LINDEN-SPE-7096	2 x 22 AWG	7.9
<a href="#">LINDEN-SPE-7594</a>	1-FO-2-CU-BB-110	2.8	1 x LINDEN-SPE-7096	2 x 22 AWG	9
<a href="#">LINDEN-SPE-7545</a>	1-FO-2-CU-BB-110	2.87	1 x LINDEN-SPE-7096	2 x 20 AWG	10.5
<a href="#">LINDEN-SPE-7459</a>	1-FO-2-CU-EE-116	2.95	1 x LINDEN-SPE-7069	2 x 24 AWG	8.5
<a href="#">LINDEN-SPE-7140</a>	1-FO-2-CU-BB-115-22759	2.9	1 x LINDEN-SPE-7096	2 x 22 AWG	7.0
<a href="#">LINDEN-SPE-7156</a>	1-FO-2-CU-BB-115	2.9	1 x LINDEN-SPE-7034	2 x 24 AWG	6.0
<a href="#">LINDEN-SPE-7440</a>	1-FO-4-CU-BB-115	2.9	1 x LINDEN-SPE-7096	2 x 24 AWG & 2 x 28 AWG	9.0
<a href="#">LINDEN-SPE-7157</a>	1-FO-2-CU-BB-120-22759	3.0	1 x LINDEN-SPE-7043	2 x 22 AWG	8.5
<a href="#">LINDEN-SPE-7158</a>	1-FO-2-CU-EE-120-22759-24	3.0	1 x LINDEN-SPE-7096	2 x 24 AWG	8.5
<a href="#">LINDEN-SPE-7423</a>	2-FO-2-CU-Z-120	3.0	2 x LINDEN-SPE-7034	2 x 22 AWG	9.2
<a href="#">LINDEN-SPE-7437</a>	1-FO-2-CU-BB-120	3.0	1 x LINDEN-SPE-7096	2 x 20 AWG	13.2
<a href="#">LINDEN-SPE-7493</a>	1-I-2-CU-Q-120)	3.0	1 x Multimode (62.5um)	2 x 24 AWG	8.5
<a href="#">LINDEN-SPE-7557</a>	1-FO-2-CU-O-112-BB-122	3.1	1 x LINDEN-SPE-7034	2 x 22 AWG	10.5
<a href="#">LINDEN-SPE-7185</a>	1-FO-3-CU-O-116-BB-125-22759	3.2	1 x LINDEN-SPE-7096	2 x 22 AWG & 1 x 26 AWG	8.25
<a href="#">LINDEN-SPE-7497</a>	1-I-2-CU-EE-126	3.2	1 x Multimode (62.5um)	2 x 22 AWG	11
<a href="#">LINDEN-SPE-7186</a>	1-FO-3-CU-O-R-116-BB-125-22759	3.2	1 x LINDEN-SPE-7096	2 x 22 AWG & 1 x 26 AWG	9.1
<a href="#">LINDEN-SPE-7566</a>	2-FO-2-CU-BB-128	3.25	1 x LINDEN-SPE-7096	2 x 20 AWG	11.8
<a href="#">LINDEN-SPE-7187</a>	1-FO-3-CU-O-120-BB-130-22759	3.3	1 x LINDEN-SPE-7096	2 x 20 AWG & 1 x 26 AWG	12.0
<a href="#">LINDEN-SPE-7215</a>	1-FO-3-CU-O-125-BB-130-22759M	3.3	1 x LINDEN-SPE-7096	2 x 20 AWG & 1 x 26 AWG	9.5
<a href="#">LINDEN-SPE-7381</a>	1-FO-4-CU-O-130	3.3	1 x LINDEN-SPE-7096	2 x 20 AWG & 2 x 28 AWG	14.7
<a href="#">LINDEN-SPE-7258</a>	1-FO-3-CU-BB-133	3.4	1 x LINDEN-SPE-7096	2 x 20 AWG & 1 x 26 AWG	12.8
<a href="#">LINDEN-SPE-7352</a>	1-FO-2-CU-O-100-Q-140	3.5	1 x LINDEN-SPE-7096	2 x 24 AWG	8.4
<a href="#">LINDEN-SPE-7535</a>	1-FO-2-CU-O-129-BB-139	3.5	1 x LINDEN-SPE-7034	2 x 28 AWG	7.5
<a href="#">LINDEN-SPE-7474</a>	2-FO-2-CU-EE-140	3.6	2 x LINDEN-SPE-7034	2 x 22 AWG	11.8
<a href="#">LINDEN-SPE-7335</a>	1-FO-4-CU-BB-1245	3.7	1 x LINDEN-SPE-7034	4 x 24 AWG	10
<a href="#">LINDEN-SPE-7336</a>	1-FO-4-CU-EE-150-22759-24	3.8	1 x LINDEN-SPE-7096	4 x 24 AWG	12.7
<a href="#">LINDEN-SPE-7421</a>	2-FO-2-CU-BB-149	3.8	2 x LINDEN-SPE-7034	2 x 16 AWG	22.4
<a href="#">LINDEN-SPE-7436</a>	1-FO-2-CU-BB-147	3.8	1 x LINDEN-SPE-7096	2 x 16 AWG	21.5
<a href="#">LINDEN-SPE-7439</a>	1-FO-4-CU-BB-153	3.9	1 x LINDEN-SPE-7096	2 x 16 AWG	30.0
<a href="#">LINDEN-SPE-7505</a>	3-FO-2-CU-O-144-BB-154	3.9	3 x LINDEN-SPE-7034	2 x 16 AWG	28.5
<a href="#">LINDEN-SPE-7559</a>	2-FO-2-CU-O-157	4.0	2 x LINDEN-SPE-7207	2 x 26 AWG	11.5
<a href="#">LINDEN-SPE-7155</a>	1-FO-2-CU-BB-160-22759	4.1	1 x LINDEN-SPE-7096	2 x 20 AWG	12
<a href="#">LINDEN-SPE-7183</a>	2-FO-2-CU-BB-160-22759	4.1	2 x LINDEN-SPE-7096	2 x 20 AWG	12
<a href="#">LINDEN-SPE-7259</a>	1-FO-3-CU-EE-164	4.2	1 x LINDEN-SPE-7096	2 x 20 AWG & 1 x 26 AWG	18.8
<a href="#">LINDEN-SPE-7315</a>	1-FO-4-CU-O-143-R-163	4.2	1 x LINDEN-SPE-7034	2 x 20 AWG & 2 x 28 AWG	16
<a href="#">LINDEN-SPE-7443</a>	2-FO-4-CU-BB-165	4.2	2 x LINDEN-SPE-7096	2 x 22 AWG & 1 x 22 AWG TP	18.5
<a href="#">LINDEN-SPE-7358</a>	1-FO-2-CU-BB-170-22759	4.3	1 x LINDEN-SPE-7207	2 x 18 AWG	14.5
<a href="#">LINDEN-SPE-7519</a>	2-FO-4-CU-O-156-BB-166	4.3	1 x LINDEN-SPE-7283	1 x #20 AWG STP 1 x #24 AWG STP	16
<a href="#">LINDEN-SPE-7580</a>	1-FO-2-CU-O-153-BB-173	4.4	1 x LINDEN-SPE-7096	2 x 16 AWG	26.3
<a href="#">LINDEN-SPE-7181</a>	2-FO-2-CU-EE-180-22759-24	4.6	2 x LINDEN-SPE-7034	2 x 24 AWG	7.0
<a href="#">LINDEN-SPE-7353</a>	1-FO-2-CU-O-137-Q-187	4.75	1 x LINDEN-SPE-7096	2 x 20 AWG	17.5
<a href="#">LINDEN-SPE-7581</a>	2-FO-2-CU-O-153-EE-193	4.9	2 x LINDEN-SPE-7096	2 x 16 AWG	29.8
<a href="#">LINDEN-SPE-7528</a>	1-FO-2-CU-EE-200-22759	5.0	1 x LINDEN-SPE-7196	2 x 20 AWG	21.5
<a href="#">LINDEN-SPE-7586</a>	1-FO-6-CU-O-201-Q-240	6.1	1 x LINDEN-SPE-7043	6 x 22 AWG	28.8
<a href="#">LINDEN-SPE-7597</a>	1-FO-2-CU-EE-289	7.3	1 x LINDEN-SPE-7096	2 x 14 AWG	34
<b>Lightweight – Drones (w/o fiber optic)</b>					
<a href="#">LINDEN-SPE-7477</a>	2-CU-O-86-B-96	2.4	None	2 x 24 AWG	5.8
<a href="#">LINDEN-SPE-7406</a>	2-CU-BB-122-22	3.1	None	2 x 22 AWG	9.0
<a href="#">LINDEN-SPE-7382</a>	2-CU-BB-122-20	3.1	None	2 x 20 AWG	13.5
<a href="#">LINDEN-SPE-7397</a>	3-CU-PP-110-Q-130	3.3	None	2 x 20 AWG & 1 x 28 AWG	12.5
<a href="#">LINDEN-SPE-7574</a>	2-CU-O-133-Q-133	3.4	None	2 x 20 AWG	12



Spec No.	Part No.	OD (mm)	Fiber Type	Conductor Type	Weight (lbs/1kft)
<a href="#">LINDEN-SPE-7337</a>	4-CU-O-120-R-140	3.6	None	2 x 24 AWG & 2 x 28 AWG	12
<a href="#">LINDEN-SPE-7287</a>	2-CU-BB-145	3.7	None	2 x 22 AWG TP	10
<a href="#">LINDEN-SPE-7486</a>	2-CU-BB-146	3.7	None	2 x 18 AWG	13
<a href="#">LINDEN-SPE-7438</a>	2-CU-BB-147	3.8	None	2 x 16 AWG	21.4
<a href="#">LINDEN-SPE-7343</a>	4-CU-BB-160	4.0	None	2 x 22 AWG & 2 x 26 AWG	10.5
<a href="#">LINDEN-SPE-7517</a>	2-CU-O-147-BB-147-BB-157	4.0	None	2 x #16 AWG	23
<a href="#">LINDEN-SPE-7340</a>	2-CU-BB-165	4.2	None	2 x 18 AWG TP	17.5
<a href="#">LINDEN-SPE-7508</a>	2-FO-2-CU-O-157-Z-167	4.2	None	2 x 18 AWG TP	16.7
<a href="#">LINDEN-SPE-7188</a>	6-CU-Q-168	4.3	None	4 x 26 AWG + 2 x 28 AWG	15
<a href="#">LINDEN-SPE-7269</a>	2-CU-EE-174	4.4	None	2 x 24 AWG	10.7
<a href="#">LINDEN-SPE-7380</a>	2-CU-NN-143-R-183	4.6	None	2 x 20 AWG	16

### Heavy Duty – Aerostat (fiber optic)

<a href="#">LINDEN-SPE-7542</a>	7096-O-135-OO-142	3.6	1 x LINDEN-SPE-7096	None	8.5
<a href="#">LINDEN-SPE-7338</a>	2-SM-2-CU-O-185-BB-205	5.2	1 x LINDEN-SPE-7283	2 x 18 AWG	22.5
<a href="#">LINDEN-SPE-7472</a>	4-SM-2-CU-O-185-BB-205	5.2	4 x Singlemode 2 x LINDEN-SPE-7283	2 x 18 AWG	23.6
<a href="#">LINDEN-SPE-7402</a>	1-FO-2-CU-O-220	5.6	1 X LINDEN-SPE-7096	2 x 14 AWG	34.0
<a href="#">LINDEN-SPE-7496</a>	4-FO-2-CU-O-192-BB-222	5.6	2 x Singlemode 1 x LINDEN-SPE-7283	2 x 18 AWG	24
<a href="#">LINDEN-SPE-7444</a>	6-FO-2-CU-T-167-U-227	5.75	6 x Singlemode	2 x 20 AWG	25
<a href="#">LINDEN-SPE-7502</a>	8-FO-2-CU-O-197-BB-227	5.8	8 x Singlemode (LT)	2 x 18 AWG	25.5
<a href="#">LINDEN-SPE-7174</a>	1-FO-3-CU-O-174-Q-254	6.5	1 x LINDEN-SPE-7034	2 x 24 AWG & 1 x 26 AWG	25
<a href="#">LINDEN-SPE-7179</a>	1-FO-3-CU-S-130-O-174-Q-254	6.5	1 x LINDEN-SPE-7034	2 x 24 AWG & 1 x 26 AWG	25
<a href="#">LINDEN-SPE-7232</a>	2-FO-3-CU-S-130-O-191-Q-257	6.5	2 x LINDEN-SPE-7034	2 x 24 AWG & 1 x 26 AWG	27
<a href="#">LINDEN-SPE-7575</a>	4-FO-P-132-O-259-OO-300	7.6	4 x Singlemode (LT)	None	38
<a href="#">LINDEN-SPE-7499</a>	4-FO-2-CU-O-265-B-315	8.0	4 x Singlemode 2 x LINDEN-SPE-7283	2 x 24 AWG	83
<a href="#">LINDEN-SPE-7525</a>	4-FO-2-CU-O-226-OO-318	8.1	2 x LINDEN-SPE-7283	2 x 24 AWG	56
<a href="#">LINDEN-SPE-7426</a>	2-FO-2-CU-O-229-FQ-329	8.35	1 x LINDEN-SPE-7283	2 x 20 AWG	37
<a href="#">LINDEN-SPE-7452</a>	1-FO-2-CU-O-270-S-330	8.4	1 x LINDEN-SPE-7260	2 x 12 AWG	100
<a href="#">LINDEN-SPE-7453</a>	1-FO-2-CU-O-280-S-340	8.6	4 x LINDEN-SPE-7260	2 x 12 AWG	69
<a href="#">LINDEN-SPE-7289</a>	4-FO-P-140-O-308-OO-349	8.8	4 x LINDEN-SPE-7096	None	57
<a href="#">LINDEN-SPE-7482</a>	1-FO-2-CU-O-289-EE-349	8.9	1 x LINDEN-SPE-7098	2 x 12 AWG	72
<a href="#">LINDEN-SPE-7314</a>	2-FO-4-CU-O-320-U-390-BLK	9.9	2 x LINDEN-SPE-7043	4 x 22 AWG	60
<a href="#">LINDEN-SPE-7576</a>	1-FO-2-CU-P-343-O-353-OO-393	10.0	1 x LINDEN-SPE-7098	None	107
<a href="#">LINDEN-SPE-7596</a>	3-FO-5-CU-O-329-Q-429	10.9	3 x Singlemode (LT)	3 x 16 AWG	87
<a href="#">LINDEN-SPE-7592</a>	2-FO-2-CU-T-358-X-440	11.2	2 x Singlemode (LT)	2 x 22 AWG	74
<a href="#">LINDEN-SPE-7323</a>	2-FO-2-CU-S-122-T-425-OO-465	12.4	1 x LINDEN-SPE-7283	2 x 20 AWG	65
<a href="#">LINDEN-SPE-7476</a>	1-FO-4-CU-P-270-O-411-B-491	12.5	2 x Singlemode (LT)	2 x 16 AWG TP	109
<a href="#">LINDEN-SPE-7341</a>	2-FO-2-CU-NN-216-T-422-B-520	13.2	1 X LINDEN-SPE-7283	2 x 16 AWG	94
<a href="#">LINDEN-SPE-7109</a>	2-FO-5-CU-O-155-Q-550	13.9	2 x LINDEN-SPE-7034	5 x 16 AWG	138

### Heavy Duty – Aerostat (w/o fiber optic)

<a href="#">LINDEN-SPE-7278</a>	4-CU-T-181-OO-197	5.0	None	4 x 22 AWG	20.0
<a href="#">LINDEN-SPE-7270</a>	2-CU-EE-253	6.4	None	2 x 24 AWG	12.7
<a href="#">LINDEN-SPE-7279</a>	6-CU-T-300-OO-316	8.0	None	3 x 24 STP & 3 x 24 TRPL	52
<a href="#">LINDEN-SPE-7454</a>	4-CU-O-270-S-330	8.4	None	2 x 22 AWG STP	74
<a href="#">LINDEN-SPE-7342</a>	2-CU-O-270-S-330	8.4	None	2 x 12 AWG	67
<a href="#">LINDEN-SPE-7488</a>	6-CU-O-276-EE-336	8.5	None	2 x 12 AWG & 2 x 22 AWG TP	73
<a href="#">LINDEN-SPE-7475</a>	4-CU-P-237-O-390-B-470	12.0	None	2 x 22 AWG TP	104

CONTACT LINDEN FOR DRAWINGS, SPECIFICATIONS OR CUSTOM REQUIREMENTS

An aerial photograph of a busy beach area. The water is a vibrant blue-green, and numerous small motorboats and larger yachts are scattered across the surface. In the foreground, many people are swimming and sunbathing. A blue railing is visible at the bottom edge of the frame. A large, semi-transparent green graphic with a circular pattern is overlaid on the center of the image.

# *Gel-Filled Loose Tube*


**1 to 12 Channels**

**Lightweight & Flexible**



# Gel Filled Loose Tube

Some hybrid cable designs benefit from isolating the fiber optics from large conductors and other elements that may crush the fiber and induce attenuation. In these cases, traditionally a fiber in a metal tube, or FIMT, is used. FIMT is heavy, stiff and expensive. Polymer loose tubes offer the protection and isolation of the internal fibers, but provide a lightweight, flexible and cost-effective alternative to FIMT. A robust, field proven, package for your vital communication link.

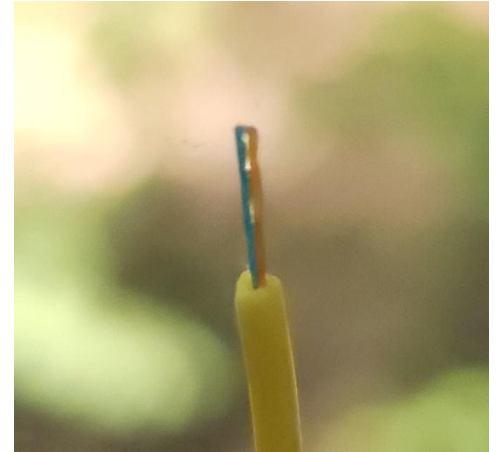

## Features

- Sizes range from 1.6mm to 3mm OD
- 1-channel to 12-channel designs available
- Singlemode, multimode or a combination of both.
- Thixotropic gel filled
- Dry tubes also available
- Long continuous lengths >3km available
- Color coded fibers and/or jacketing

## Advantages

- Highly Flexible
- Thin, lightweight, yet strong
- Custom design services available





### Singlemode

Spec No.	Part No.	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Fiber Type	Weight (kg/km)
<a href="#">LINDEN-SPE-7283</a>	2-SM-V-63	1.6	0.35	0.25	Two (2) x Singlemode	1.64
<a href="#">LINDEN-SPE-7265</a>	2-SM-V-102	2.6	0.35	0.25	Two (2) x Singlemode	5.09
<a href="#">LINDEN-SPE-7264</a>	4-SM-V-102	2.6	0.35	0.25	Four (4) x Singlemode	5.09
<a href="#">LINDEN-SPE-7267</a>	8-SM-U-114	2.9	0.35	0.25	Eight (8) x Singlemode	5.9
<a href="#">LINDEN-SPE-7299</a>	12-SM-U-114	2.9	0.45	0.40	Twelve (12) x Singlemode	5.9
<a href="#">LINDEN-SPE-7266</a>	5-SM-I-118	3.0	0.40	0.30	Fiver (5) x Singlemode	5.7
<a href="#">LINDEN-SPE-7271*</a>	4-SM-V-102-O-217-FQ-265	6.7	0.45	0.35	Four (4) x Singlemode	1.035 S.G

### Multimode

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Fiber Type	Weight (kg/km)
<a href="#">LINDEN-SPE-7389</a>	2-F-V-63	1.6	3.0	1.0	Two (2) x 50µm	1.64
<a href="#">LINDEN-SPE-7284</a>	3-I-V-63	1.6	3.0	0.6	Two (2) x 62.5µm	1.64
<a href="#">LINDEN-SPE-7445</a>	1-F-J-36-TT-70	1.8	3.0	1.0	One (1) x 50µm	2.00
<a href="#">LINDEN-SPE-7390</a>	4-F-V-102	2.6	3.0	1.0	Four (4) x 50µm	5.09
<a href="#">LINDEN-SPE-7518</a>	16-FO-V-114-O-121-J-137	3.5	4.0	2.0	Sixteen (16) x 50µm	14.4

### Singlemode & Multimode

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm/1300nm (dB/km)	Attenuation @ 1310nm/1550nm (dB/km)	Fiber Type	Weight (kg/km)
<a href="#">LINDEN-SPE-7357</a>	2-SM-2-MM-V-102	2.6	3.0/1.0	0.35/0.25	Two (2) x Singlemode & Two (2) x 50µm	5.09

\*Denotes Buoyant Design

CONTACT LINDEN FOR DRAWINGS, SPECIFICATIONS OR CUSTOM REQUIREMENTS




***Specialty Copper***  
**Buoyant Designs**  
**Built to Last**





# Specialty Copper

Using the technology we developed building more difficult fiber optic and hybrid cables, Linden Photonics now applies that materials and design knowledge to our line of specialty copper cables. Using specialty materials that make a cable light, temperature resistant, radiation hardened or **buoyant**, we draw from our years of expertise in specialty markets such as subsea, space and other harsh environments in between. Linden can customize your size, weight and strength; from **high-strength** designs to complex configurations incorporating mil-spec conductors. Our cables are compact and rugged; flexible and strong!

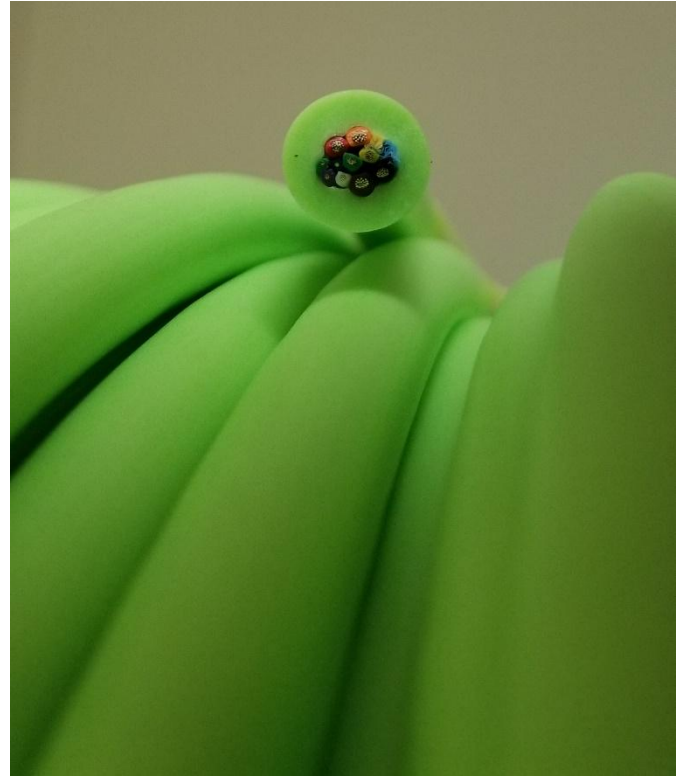


## Features

- **Wide Range of Size Capabilities:** from 3mm to >20mm OD
- Designs from 100 to 5,000 lbs work load
- Twisted Pairs / Shielded Twisted Pairs
- High Voltage
- Various insulation options
- MIL M22759 Tefzel coated wire – up to 1,000V rated
- Braided or extruded jackets



## Advantages

- Highly Flexible
- Thin, lightweight, yet strong
- Custom design services available

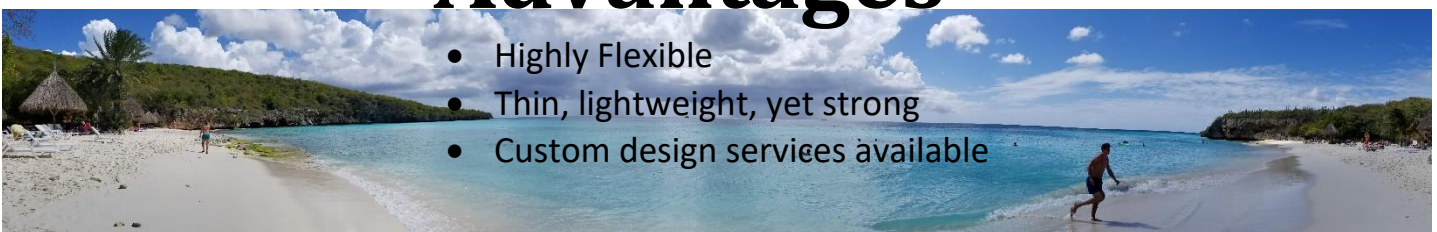



# Buoyant

Spec No.	Part No.	OD (mm)	Conductor Type	Tensile Strength (lbs)	Density (s.g.) nominal
<a href="#">LINDEN-SPE-7302</a>	2-CU-O-100-L-140-ORN	3.5	2 x 28 AWG	250	1.0
<a href="#">LINDEN-SPE-7560</a>	2-CU-O-82-FQ-140	3.55	2 x 28 AWG	300	1.01
<a href="#">LINDEN-SPE-7360</a>	2-CU-O-100-L-150	3.8	2 x 26 AWG	250	1.0
<a href="#">LINDEN-SPE-7296</a>	2-CU-O-100-L-153-ORN	3.9	2 x 26 AWG	250	1.0
<a href="#">LINDEN-SPE-7165</a>	2-CU-O-62-FQ-156-YEL	4.0	1 x 26 AWG TP	100	0.99
<a href="#">LINDEN-SPE-7359</a>	2-CU-NN-O-100-L-160	4.0	2 x 26 AWG	250	1.0
<a href="#">LINDEN-SPE-7135</a>	2-CU-O-80-FQ-164	4.15	2 x 28 AWG	300	0.98
<a href="#">LINDEN-SPE-7244</a>	2-CU-O-80-FQ-164-Q-170	4.3	2 x 28 AWG	300	0.98
<a href="#">LINDEN-SPE-7510</a>	2-CU-O-126-FQ-175	4.5	1 x 22 AWG TP	250	1.0
<a href="#">LINDEN-SPE-7133</a>	2-CU-FQ-182	4.6	2 x 26 AWG	300	1.0
<a href="#">LINDEN-SPE-7246</a>	2-CU-O-80-Q-100-FQ-170-Q-190	4.8	2 x 28 AWG	300	0.98
<a href="#">LINDEN-SPE-7247</a>	2-CU-O-80-Q-100-FQ-170-Q-190-NWB	4.8	2 x 28 AWG	300	0.98
<a href="#">LINDEN-SPE-7520</a>	2-CU-O-97-FQ-200	5.0	2 x 26 AWG	600	0.99
<a href="#">LINDEN-SPE-7224</a>	2-CU-O-110-FQ-210-YEL	5.3	2 x 24 AWG STP + 1 x 26 AWG DW	400	1.029
<a href="#">LINDEN-SPE-7425</a>	4-CU-O-163-FQ-218	5.5	2 x 28 AWG TP	750	0.99
<a href="#">LINDEN-SPE-7433</a>	2-CU-O-102-L-150	3.8	2 x 26 AWG	150	0.98
<a href="#">LINDEN-SPE-7530</a>	2-CU-B-93-O-101-L-154	3.9	2 x 26 AWG	250	1.0
<a href="#">LINDEN-SPE-7564</a>	2-CU-O-91-FQ-165	4.2	2 x 26 AWG	300	1.01
<a href="#">LINDEN-SPE-7540</a>	2-CU-O-108-L-170	4.3	2 x 26 AWG	500	1.0
<a href="#">LINDEN-SPE-7460</a>	2-CU-O-110-FQ-215	5.5	2 x 24 AWG STP 1 x 26 AWG DW	800	1.05
<a href="#">LINDEN-SPE-7145</a>	5-CU-O-20-FQ-248	6.3	5 x 26 AWG	1,500	1.0
<a href="#">LINDEN-SPE-7569</a>	2-CU-B-68-O-78-FQ-230-Q-250	6.4	2 x 24 AWG	300	0.94
<a href="#">LINDEN-SPE-7424</a>	2-CU-O-110-X-275-YEL	7.0	2 x 24 AWG STP & 1 x 26 AWG DW	400	1.025
<a href="#">LINDEN-SPE-7492</a>	2-CU-O-110-FQ-275-YEL	7.0	2 x 24 AWG STP; 1 x 26 AWG DW	800	1.05
<a href="#">LINDEN-SPE-7370</a>	4-FO-O-200-FQ-295	7.5	2 x 22 AWG + 2 x 26 AWG TP	450	1.03
<a href="#">LINDEN-SPE-7431</a>	4-CU-O-189-FQ-299	7.6	4 x 26 AWG TP	300	1.0
<a href="#">LINDEN-SPE-7301</a>	2-CU-O-200-FQ-300-BLK	7.6	2 x 20 AWG	6,667	1.02
<a href="#">LINDEN-SPE-7606</a>	4-CU-O-176-FQ-300	7.6	4 x 26 AWG	350	1.0
<a href="#">LINDEN-SPE-7598</a>	2-CU-O-180-FQ-300	7.62	2 x 26 AWG STP	350	0.99
<a href="#">LINDEN-SPE-7599</a>	2-CU-O-170-FQ-300	7.62	2 x 22 AWG	350	0.99
<a href="#">LINDEN-SPE-7584</a>	2-CU-L-94-O-123-X-305	7.7	2 x 20 AWG	1,000	1.025
<a href="#">LINDEN-SPE-7328</a>	4-FO-O-177-FQ-315	8.0	2 x 24 AWG STP + 1 x 26 AWG DW	300	1.025
<a href="#">LINDEN-SPE-7243</a>	4-CU-O-150-FQ-320-YEL	8.1	4 x 24 TP	300	1.03
<a href="#">LINDEN-SPE-7544</a>	4-CU-O-201-FQ-325	8.2	2 x 24 AWG + 1 x 22 AWG	750	0.99
<a href="#">LINDEN-SPE-7117</a>	2-CU-O-283-Q-360	9.2	2 x 20 AWG	1,500	1.0
<a href="#">LINDEN-SPE-7147</a>	3-CU-O-20-FQ-360-GRA	9.1	1 x 20 AWG TP; 2 x 20 AWG	1,500	1.0
<a href="#">LINDEN-SPE-7118</a>	2-CU-O-283-Q-363	9.2	2 x 20 AWG	3,000	1.03
<a href="#">LINDEN-SPE-7298</a>	2-CU-O-236-FQ-365-YEL	9.3	2 x 18 AWG	10,000	1.02
<a href="#">LINDEN-SPE-7524</a>	4-CU-O-180-X-380	9.7	2 x 24 AWG TP + 1 x 26 AWG DW	800	1.025
<a href="#">LINDEN-SPE-7538</a>	6-CU-O-220-L-355-Q-390	9.9	2 x 20 AWG + 4 x 26 AWG	1,100	0.99
<a href="#">LINDEN-SPE-7379</a>	4-CU-O-252-FQ-393	10.0	2 x 18 AWG + 1 x 22 STP + 1 x 22 AWG DW	1,000	1.03
<a href="#">LINDEN-SPE-7432</a>	4-CU-O-227-FQ-407-YEL	10.3	2 x 18 AWG & 1 x 22 AWG TP & 1 x 22 AWG	1,000	1.03
<a href="#">LINDEN-SPE-7172</a>	10-CU-O-260-FQ-420	10.7	4 x 20 AWG; 1 x 24 AWG TP; 2 x 28 AWG TP	200	1.0
<a href="#">LINDEN-SPE-7190</a>	8-CU-O-260-FQ-420	10.7	4 x 20 AWG; 1 x 24 AWG TP; 1 x 24 AWG TP	200	1.02
<a href="#">LINDEN-SPE-7254</a>	5-CU-O-310-FQ-420	10.7	2 x 18 AWG; 2 x 22 STP; 1 x 22 AWG	1,000	1.03
<a href="#">LINDEN-SPE-7225</a>	4-CU-O-316-FQ-422-YEL	10.7	1 x 18 AWG STP + 1 x 24 WG STP	400	1.025
<a href="#">LINDEN-SPE-7173</a>	3-CU-O-240-FQ-350-Q-430	10.9	1x20 AWG TP; 1x28 AWG TP; 1x24 AWG TP	1,200	0.98
<a href="#">LINDEN-SPE-7571</a>	6-CU-O-230-FQ-400-Q-430	10.9	2 x 18 AWG + 4 x 26 AWG	1,100	0.99
<a href="#">LINDEN-SPE-7463</a>	5-CU-O-245-FQ-450	11.5	2 x 16 AWG; 2 x 22 AWG STP; 1 x 22 AWG	2,000	1.03
<a href="#">LINDEN-SPE-7523</a>	2-CU-X-160-O-314-X-500	12.7	1 x 24 AWG	4,400	1.03
<a href="#">LINDEN-SPE-7119</a>	5-CU-Q-562	14.3	2 x 16 AWG; 1 x 22 AWG; 1 x 24 AWG	2,400	1.0
<a href="#">LINDEN-SPE-7184</a>	20-CU-CAT6-O-336-FQ-566	14.4	20 x 24 AWG + CAT6	200	0.96



Spec No.	Part No.	OD (mm)	Conductor Type	Tensile Strength (lbs)	Density (s.g.) nominal
<a href="#">LINDEN-SPE-7589</a>	3-CU-O-393-FQ-573	14.6	2 x 24 AWG + RG-58 Coax	1,200	0.99
<a href="#">LINDEN-SPE-7175</a>	19-CU-CAT6-O-336-FQ-586	14.9	19 x 24 AWG + CAT6	200	0.98
<a href="#">LINDEN-SPE-7176</a>	7-CU-T-287-X-523-Q-602	15.3	3 x #16, 1 x #18, 1 x #24TP, 1 x #24, Coax	1,100	1.03
<a href="#">LINDEN-SPE-7604</a>	6-CU-O-305-FQ-625	15.9	2 x 12 AWG + 4 x 26 AWG TP	2,000	1.029
<a href="#">LINDEN-SPE-7590</a>	14-CU-O-393-FQ-793	20.1	14 x 24 AWG	4,500	0.99

## Non-Buoyant

Spec No.	Part No.	OD (mm)	Conductor Type	Tensile Strength (lbs)
<a href="#">LINDEN-SPE-7306</a>	2-CU-HH-110	2.8	2 x 20 AWG	N/A
<a href="#">LINDEN-SPE-7134</a>	2-CU-O-80-FQ-120	3.0	2 x 28 AWG	100
<a href="#">LINDEN-SPE-7561</a>	2-CU-O-91-Q-130	3.3	2 x 26 AWG	300
<a href="#">LINDEN-SPE-7236</a>	1-CO-O-130-Q-150-YEL	3.81	1 x 28 (Coax)	300
<a href="#">LINDEN-SPE-7144</a>	2-CU-I-157	4.0	2 x 30 AWG	800
<a href="#">LINDEN-SPE-7242</a>	1-CU-FQ-160-YEL	4.0	1 x 26 AWG TP	300
<a href="#">LINDEN-SPE-7451</a>	2-CU-O-97-Q-157	4.0	2 x 26 AWG	600
<a href="#">LINDEN-SPE-7235</a>	2-CU-O-138-Q-153-YEL	3.88	2 x 22 AWG TP	300
<a href="#">LINDEN-SPE-7434</a>	3-CU-Q-177	4.5	3 x 22 AWG	N/A
<a href="#">LINDEN-SPE-7521</a>	2-CU-O-130-Q-190	4.8	2 x 24 AWG	600
<a href="#">LINDEN-SPE-7588</a>	2-CU-O-101-Q-200	5.0	2 x 24 AWG	900
<a href="#">LINDEN-SPE-7489</a>	4-CU-O-177-Q-232	5.9	4 x 24 AWG	300
<a href="#">LINDEN-SPE-7356</a>	3-CU-O-200-S-230	6.0	3 x 16 AWG	250
<a href="#">LINDEN-SPE-7115</a>	2-CU-O-161-Q-241	6.1	2 x 26 AWG	1,800
<a href="#">LINDEN-SPE-7116</a>	2-CU-O-175-Q-40-255	6.5	2 x 26 AWG	2,200
<a href="#">LINDEN-SPE-7285</a>	3-CU-O-230-S-260	6.6	2 x 26 AWG + 3 X 14 AWG	250
<a href="#">LINDEN-SPE-7378</a>	6-CU-O-214-Q-264	6.7	3 x 26 AWG TP	250
<a href="#">LINDEN-SPE-7447</a>	2-CU-AA-O-242-Q-294	7.5	2 x 16 AWG	250
<a href="#">LINDEN-SPE-7428</a>	2-CU-AA-O-242-Q-300)	7.6	2 x 14 AWG	250
<a href="#">LINDEN-SPE-7448</a>	4-CU-PP-O-250-Q-310	7.9	3 x 14 AWG + Mini Coax	750
<a href="#">LINDEN-SPE-7243</a>	4-CU-O-150-FQ-320-YEL	8.1	4 x 24 TP	300
<a href="#">LINDEN-SPE-7503</a>	2-CU-O-238-Q-318	8.1	2 x 26 AWG	7,500
<a href="#">LINDEN-SPE-7393</a>	3-CU-AA-O-260-Q-325	8.3	3 x 14 AWG	250
<a href="#">LINDEN-SPE-7105</a>	4-CU-O-155-Q-340	8.6	4 x 22 AWG	440
<a href="#">LINDEN-SPE-7220</a>	3-CU-O-279-U-350-BLK	8.86	2 x 22 AWG + 1 x 22 AWG TP	5,000
<a href="#">LINDEN-SPE-7504</a>	2-CU-O-269-Q-349	8.9	2 x 26 AWG	10,000
<a href="#">LINDEN-SPE-7509</a>	2-CU-O-269-Q-349-S	8.9	1 x 26 AWG TP + 1 x 26 AWG DW	10,000
<a href="#">LINDEN-SPE-7506</a>	4-CU-PP-O-250-Q-354	9.0	3 x #14 AWG + COAX	750
<a href="#">LINDEN-SPE-7230</a>	4-CU-O-283-S-359-YEL	9.1	4 x 24 AWG STP	1,200
<a href="#">LINDEN-SPE-7607</a>	4-CU-O-235-Q-397	10.1	2 x 14 AWG + 2 x 24 AWG TP	1,200
<a href="#">LINDEN-SPE-7339</a>	4-CU-O-238-FQ-400	10.2	2 x 16 AWG + 2 x 24 TP	880
<a href="#">LINDEN-SPE-7168</a>	12-CU-O-324-Q-414-YEL	10.5	4 x 24 AWG; 2 x 18 AWG; 6 x 20 AWG	1,200
<a href="#">LINDEN-SPE-7239</a>	18-CU-CAT6-Q-420	10.7	18 x 24 AWG + Cat 6	200
<a href="#">LINDEN-SPE-7240</a>	7-CU-M-266-O-320-FQ-420-ORN	10.7	4 x 16 AWG + 3 x 24 AWG TP	2,500
<a href="#">LINDEN-SPE-7541</a>	4-CU-PP-O-321-Q-421	10.7	3 x 14 AWG + COAX	750
<a href="#">LINDEN-SPE-7238</a>	5-CU-O-90-FQ-425	10.8	4 x 22 AWG + 1 x 26 AWG TP	1,000
<a href="#">LINDEN-SPE-7169</a>	6-CU-O-381-Q-461	11.7	2 x 16 AWG; 3 x 22 AWG TP; 1 x 20	200
<a href="#">LINDEN-SPE-7257</a>	4-CU-O-390-Q-490	12.45	4 x 18 AWG	13,500
<a href="#">LINDEN-SPE-7419</a>	10-CU-HH-221-O-435-Q-515	13	6 x 20 AWG; 4 x 24 AWG TP	450
<a href="#">LINDEN-SPE-7245</a>	4-CU-O-362-FQ-451	13.5	4 x 20 WG TP	1,200
<a href="#">LINDEN-SPE-7369</a>	4-FO-O-354-FQ-550	14	2 x 16 AWG + 2 x 22 AWG TP	4,400
<a href="#">LINDEN-SPE-7410</a>	8-CU-P-206-O-283-FQ-590	15	1 x 18 AWG STP; 3 x 22 AWG STP	6,000
<a href="#">LINDEN-SPE-7609</a>	4-CU-Q-334-O-546-X-728	18.5	4 x 20 AWG	33,000

\*TP=Twisted Pair; STP=Shielded Twisted Pair; DW=Drain Wire

### CONTACT LINDEN FOR DRAWINGS, SPECIFICATIONS OR CUSTOM REQUIREMENTS

An aerial photograph of a winding dirt road through a hilly, vegetated landscape. The terrain is covered with dense green shrubs and trees, interspersed with patches of reddish-brown soil. The road curves through the valley, and the overall scene is brightly lit, suggesting a sunny day.

***Ribbon Cables***  
**High Temperature**  
**Robust / Simple Design**



# Ribbon Cable

Our advanced fiber optic ribbon cable is built for exceptional performance in challenging environments. Designed with a robust buffering system and a compact profile, it ensures reliable data transmission with low optical loss across multiple channels. The cable's superior flexibility and durability make installation effortless, even in confined spaces. Engineered to meet rigorous industry standards, it delivers lasting reliability and high-speed performance, making it an ideal choice for demanding communication needs.



## Features

- **Robust Buffering System:** Superior protection for consistent performance in harsh environments.
- **Compact Design:** Enables easy routing and installation in confined spaces.
- **Temperature:** Standard telcom temp rating or +125C rating.
- **Exceptional Flexibility:** Facilitates simplified installation with a small bend radius.
- **Durable Construction:** Offers long-lasting reliability in demanding operational conditions.
- **Lightweight Design:** Reduces overall system weight without compromising durability.
- **Multi-Channel Capability:** Supports high data capacity with options for multiple fiber configurations.

## Advantages




- Highly Flexible
- Thin, lightweight, yet strong
- Custom design service available

## Multimode

Spec No.	Part No.	Buffer	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Fiber Type	Weight (kg/km)
<a href="#">LINDEN-SPE-7578</a>	12-AM-G-VV-13-140	PEI	4.0	2.5	Twelve (12) x 50µm OM4	2.0
<a href="#">LINDEN-SPE-7579</a>	12-AM-G-M-13-140	Fluoropolymer	4.0	2.5	Twelve (12) x 50µm OM4	2.0
<a href="#">LINDEN-SPE-7624</a>	12-N-G-M-13-140	Fluoropolymer	4.0	2.5	Twelve (12) x 50µm OM3 RadHard	2.0

## Multimode – High Temp

Spec No.	Part No.	Buffer	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Fiber Type	Weight (kg/km)
<a href="#">LINDEN-SPE-7562</a>	12-AL-G-VV-13-140	PEI	4.0	2.5	Twelve (12) x 50µm OM4	2.0
<a href="#">LINDEN-SPE-7563</a>	12-AL-G-M-13-140	Fluoropolymer	4.0	2.5	Twelve (12) x 50µm OM4	2.0
<a href="#">LINDEN-SPE-7625</a>	12-AP-G-M-13-140	Fluoropolymer	4.0	2.5	Twelve (12) x 50µm OM3 RadHard HTA	2.0
<a href="#">LINDEN-SPE-7626</a>	12-AL-G-13-122	HTA	4.0	2.5	Twelve (12) x 50µm OM4 HTA	1.3

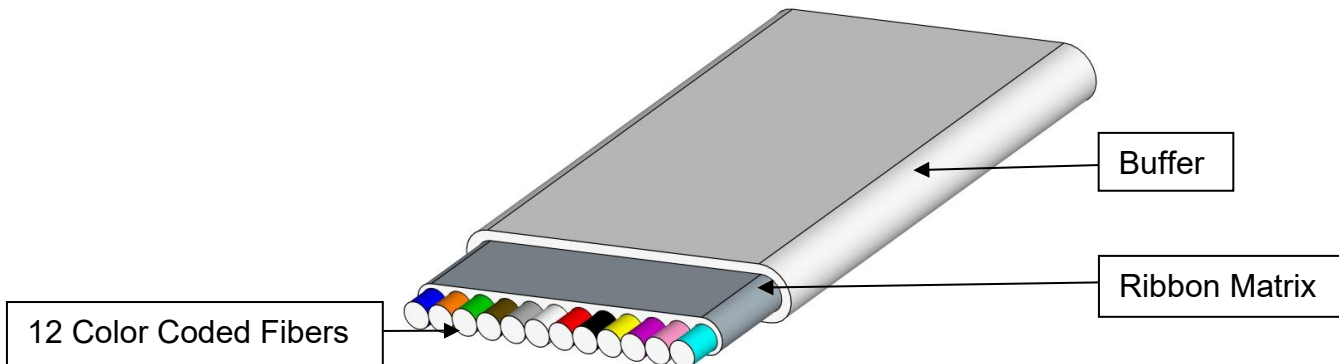

## Applications

- Avionics/Vetronics
- Digital Networks
- Ethernet Backbones
- Flight Management Systems
- HD Streaming Video Systems
- Weather Radar Systems

CONTACT LINDEN FOR DRAWINGS, SPECIFICATIONS OR CUSTOM REQUIREMENTS

# Cable Basics 101

**Minimum Bend Radius (MBR):** This is the most common question we receive about our cables and one with a complicated answer. MBR is always application and environment dependent and can vary with cable type too. Some cables can be tied in a knot and others (k)not so much. Is the cable a multi element cable? Is it under load? Is it in use? A good Rule of Thumb is  $MBR = 20 \times \text{Cable O.D.}$

**Safe Working Load (SWL):** Our cables are rated to an Ultimate Tensile Strength (UTS), which is the maximum load it will support (for a short time) before it physically breaks. Like MBR, SWL is application and environment dependent. For more complicated hybrid cables with optics it is best to operate between 15% and 20% of the rated UTS. A cable strengthened with torque balanced aramid fibers brought to 50% UTS may see up to 3% elongation.

**Optical Loss:** Optical fibers transmit data along their length in the form of light, usually at wavelengths of 850nm, 1310nm or 1550nm. As the light bounces down the core of the fiber inevitably some of the photons escape into the cladding and are lost. This loss is measured in Decibels (dB) and can be as low as 0.25 dB/km for some singlemode fibers and as much as 4 dB/km for multimode fibers. Higher loss limits effective working length.

**Lay Length:** Cables with multiple elements are twisted down the length of the cable. This is done to increase flexibility and protect these elements from being over strained. The Lay Length is the linear distance for one full twist. A shorter lay length yields a more flexible cable, but changes some characteristics related to weight size and performance. For cables with optics, the effective MBR must be considered to mitigate Optical Loss.


**Waterproofing:** There are several methods of moisture protection ranging from tape wrap, gel filling, metal tube enclosure. Optical fibers can be made hermetic by carbon deposition or LCP jacketing. LCP has been shown to be better than carbon in terms of moisture protection and it also allows for low cost, fast manufacturing.

**Conductors:** Conductors come in many shapes and sizes, but the most common is stranded, tin-plated copper. We use the American Wire Gauge (AWG) system (conversion to mm<sup>2</sup> on the next page). Generally, the larger the wire (smaller the gauge) the larger its current carrying capacity. The gauge number refers to the number of drawing processes the wire must go through to reach its size, hence the inverse relationship between gauge size and OD. Interestingly for gauges 5 through 14, the gauge is the number for wires that will fit side-by-side in one inch.


# Fiber Basics 101

## Common Fiber Types:


Multimode 62.5/125/250  
Larger core = larger power budget  
Typical maximum length <300 m



Multimode 50/125/250  
Higher Bandwidth than 62.5  
Typical maximum length <1km



Singlemode  
Small core = Very high bandwidth  
Typical maximum length 50,000m

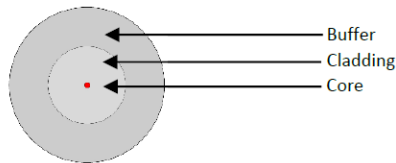

**dB Loss to Power Ratio Conversion**

dB (loss)	Power ratio
0	1.000
0.1	0.977
0.2	0.955
0.3	0.933
0.4	0.912
0.5	0.891
0.6	0.871
0.7	0.851
0.8	0.832
0.9	0.813
1	0.794
2	0.631
3	0.501
4	0.398
5	0.316
6	0.251
7	0.200
8	0.158
9	0.126
10	0.1
20	0.01
30	0.001
40	0.0001
50	0.00001
60	0.000

# Wire Charts

## AWG to mm<sup>2</sup> Conversion

#AWG	Diameter (in)	Diameter (mm)	Cross Sectional Area (mm <sup>2</sup> )
1	0.289	7.35	42.4
2	0.258	6.54	33.6
4	0.204	5.19	21.1
6	0.162	4.11	13.3
8	0.129	3.26	8.36
10	0.102	2.59	5.26
12	0.0808	2.05	3.31
14	0.0641	1.63	2.08
16	0.0508	1.29	1.31
18	0.0403	1.02	0.82
20	0.032	0.81	0.52
22	0.0254	0.65	0.33
24	0.0201	0.51	0.2
26	0.0159	0.4	0.13
28	0.0126	0.32	0.081
30	0.0984	0.25	0.051
32	0.0787	0.2	0.035

## Wire Weight and Resistance

AWG Size	Strands / Strand Size	Approximate Weight		Maximum DC Resistance	
		lbs/ 1000 ft	Kg/Km	Ohms/1000 ft	Ohms/Km
34	7/42	0.136	0.2	265	869
34	19/46	0.147	0.22	247	809
32	7/40	0.21	0.31	170	556
32	19/44	0.237	0.35	156	511
30	7/38	0.349	0.52	100	329
30	19/42	0.37	0.55	97.6	320
28	7/36	0.546	0.81	63.6	209
28	19/40	0.569	0.85	62.5	205
26	7/34	0.866	1.3	39.7	130
26	19/38	0.947	1.4	37	121
24	7/32	1.4	2.1	24.5	80.2
24	19/36	1.48	2.2	23.4	76.8
22	7/30	2.18	3.3	15.6	51.1
22	19/34	2.35	3.5	14.6	48
20	7/28	3.32	5.2	9.77	32
20	19/32	3.79	5.6	9.01	29.6
18	7/26	5.52	8.2	6.19	20.3
18	19/30	5.92	8.8	5.74	18.8
16	7/24	8.82	13.1	3.85	12.6
16	19/29	7.56	11.3	4.48	14.7
14	7/22	11.9	17.7	3.15	10.03
14	19/27	11.9	17.8	2.83	9.28

# Cable Definitions

**Ampere** — Amount of current that flows when one volt is applied across one ohm of resistance. One ampere (A) is produced by one coulomb of charge passing a point in one second.

**Attenuation** — The decrease in magnitude of a signal as it travels through any medium. It is usually expressed in decibels (dB). See power conversion chart above.

**Braid Angle** — The angle between a strand of wire in a braid shield and the longitudinal axis (i.e. axis along the length of the center) of the cable it is wound around. Also expressed in picks per inch (ppi).

**Current Carrying Capacity** — The maximum current a conductor can carry without being heated beyond a safe limit. Ampacity.

**Impedance** — The effective resistance of an electric circuit or component to alternating current, arising from the combined effects of ohmic resistance and reactance.

**Ohm** — The unit of electrical resistance. The value of resistance through which a potential difference of one volt will maintain a current of one ampere.

**Ohm's Law** — Stated  $V=IR$ ,  $I=V/R$  or  $R=V/I$ . The current  $I$  in a circuit is directly proportional to the voltage  $V$ , and inversely proportional to the resistance  $R$ .

**Power** — The amount of work per unit of time; Watts. Power equals the product of voltage and current ( $P = V \times I$ ).

**Resistance** — In DC circuits, the opposition a material offers to current flow, measured in ohms. In AC circuits, resistance is the real component of impedance, and may be higher than the value measured at DC.

**Shield** — A tape, serve or braid placed around or between electric circuits or cables or their components, to prevent signal leakage or interference.

**Voltage** — also called electromotive force, is a quantitative expression of the potential difference in charge between two points in an electrical field.

**Voltage Drop** — The voltage developed across a component or conductor by the current flow through the resistance or impedance of the component or conductor.

**Voltage Rating** — The highest voltage that may be continuously applied to a cable construction in conformance with standards or specifications.

# Our Original Website c. 2006



## Your source for Ruggedized, Flexible, Loose-tube, Cost-Effective Optical Tether Cable

Linden Photonics, Inc. designs and manufactures and markets high-strength, moisture resistant and radiation resistant, cost-competitive optical fiber cable using liquid crystal polymer buffers (Patent Pending). In conjunction with molded LCP packages, our products provide quasi-hermetic, radiation resistant packages to the military and commercial telecommunications and sensor markets. Linden prides itself on introducing innovative, high-quality optical cable products for demanding torpedo guidance, communication buoy and hybrid remotely operated vehicles (HROV).



Our products include Strong Tether Fiber Optic Cable (STFOC), multi-fiber core cable, and near-hermetic liquid crystal polymer optoelectronic packages.

We are also able to customize the above products to the customer's specific needs and application. Please browse through our site to learn more about our capabilities and to see the many ways that our technology and products can be extended to meet your needs.

**No catalog, just 3 products. Today we have over 575 in our catalog!**



## Our Products

### -Strong Tether Fiber Optic Cable (STFOC)

Linden's proprietary miniature optical fiber cable offers high tensile strength and crush resistance at a fraction of the cost of competing technologies. The extruded polymer jacket has an ultimate tensile strength in excess of 700 Mpa (~100 kpsi) and a modulus of 28 Gpa (4000 kpsi).

Developed originally for use with the Navy's Mk48 "wire" guided torpedo, the lightweight, small diameter cable is ideally suited to use with other guided munitions or tethered ROVs.

In addition to its unique mechanical properties, the STFOC cable jacket is also extremely impervious to moisture and oxygen, chemically stable, and capable of operating at temperatures up to 250 °C.

[VIEW DATA SHEET](#) • [HTML LINK](#)

### -Multi Fiber Cable



Linden offers a 3 fiber version of the STFOC, this cable offers the same mechanical and thermal performance as the STFOC.

[VIEW DATA SHEET](#) • [HTML LINK](#)

### -Near Hermetic Optoelectronic Packaging

Linden's molded LCP near-hermetic packages for use in optoelectronic components are a replacement for more costly and traditional ceramic and metal packages. Linden's proprietary LCP buffered fiber is used as pigtailed and, where it exits the package, seals seamlessly to the molded LCP housing and lid. Packaging is often 60% of the cost of an optoelectronic component. Near-hermetic molded LCP packages eliminate the need for expensive machined or cast metal and ceramic packages. LCP buffered fiber, because of lower moisture transmission, replaces more expensive metalized fiber pigtailed. Packaging cost can be reduced by an order of magnitude.

[VIEW DATA SHEET](#) • [HTML LINK](#)





## **Linden Photonics, Inc.**

**1 Park Drive, Unit 8, Westford MA 01886**

**Phone: 978-392-7985**

**Email: [info@LindenPhotonics.com](mailto:info@LindenPhotonics.com)**

**Web: [www.LindenPhotonics.com](http://www.LindenPhotonics.com)**